



| Rev. | Description | Date |
|------|-------------|---------|
| A | | 01-2023 |

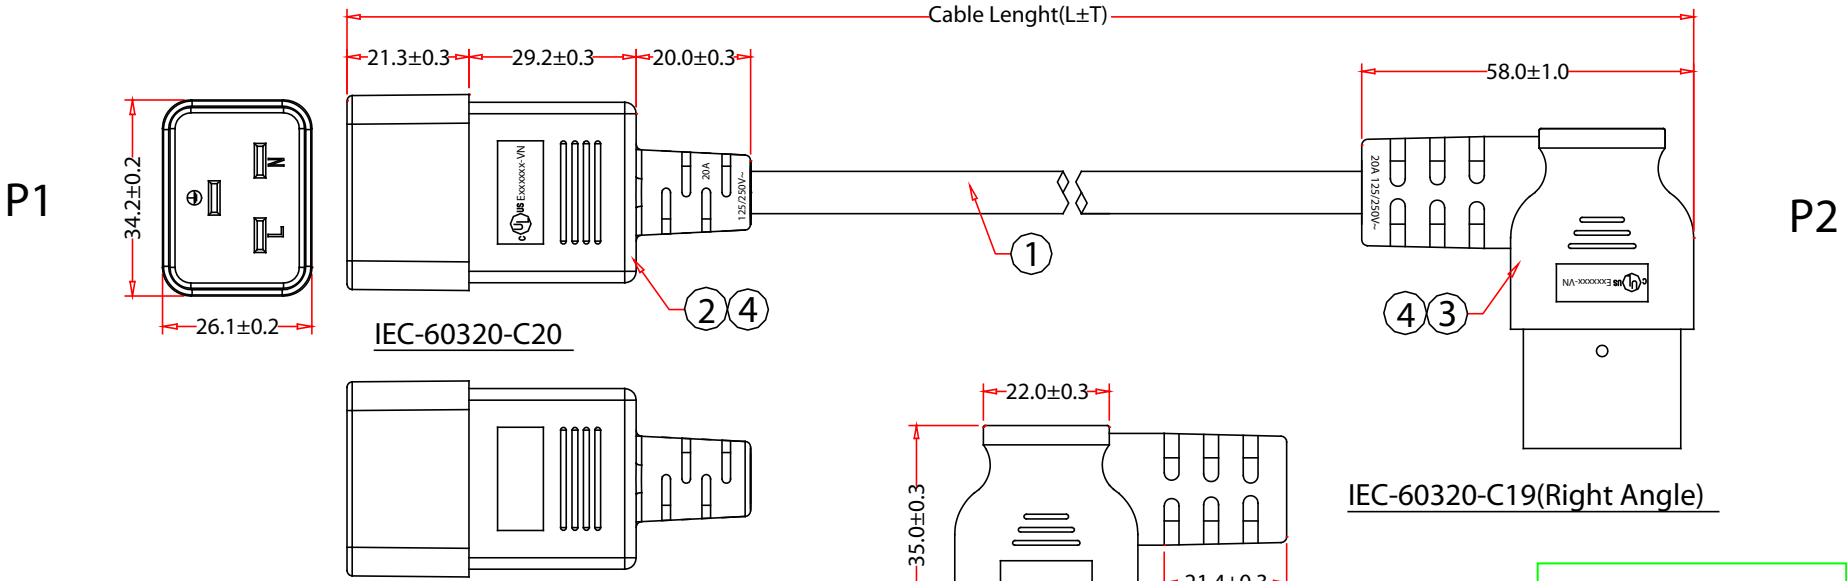


RoHS

| Pin Assignment | | |
|----------------|-------|----|
| P1 | | P2 |
| L | Black | L |
| N | White | N |
| E | Green | E |

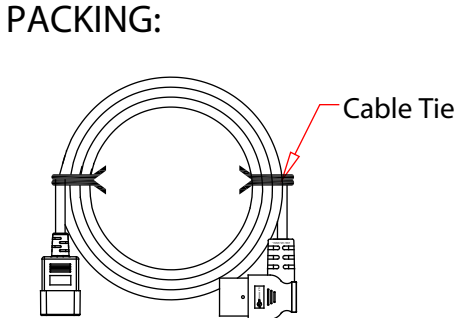

| PART NO. | CABLE LENGTH | |
|------------|--------------|-------|
| | L | ±T |
| 10W3-41603 | 3 FT | ±20mm |
| 10W3-41606 | 6 FT | ±30mm |
| 10W3-41610 | 10 FT | ±40mm |

Cable Marking:
 (UL) SJT 3/C 12AWG(3.31MM²) VW-1 105°C 300V Exxxxxx
 C(UL) SJT 3/C 3.31MM² (12AWG) FT2 105°C 300V xxxxxx MSL-VN-

| | | |
|--------------|--|---|
| Item Number: | 10W3-416xx | |
| Title: | Heavy Duty Server Power Extension Cord, Black, C20 to C19(Right Angle), 12AWG/3C, 20 Amp | |
| Drawn by: | JL |  |
| Approved by: | MAC | |
| ID: | 1 | |

| No. | Specifications |
|-----|---|
| 4 | Black Molded PVC Hood |
| 3 | UL/CSA Approved IEC-60320-C19, 20 Amp, Color: Black |
| 2 | UL/CSA Approved IEC-60320-C20, 20 Amp, Color: Black |
| 1 | UL Approved SJT 12AWG(3.13MM ²)*3C 105°C/300V, OD:11.0±0.3mm, Black |