



REV.	DESCRIPTION	DATE
A		
B		02-2006

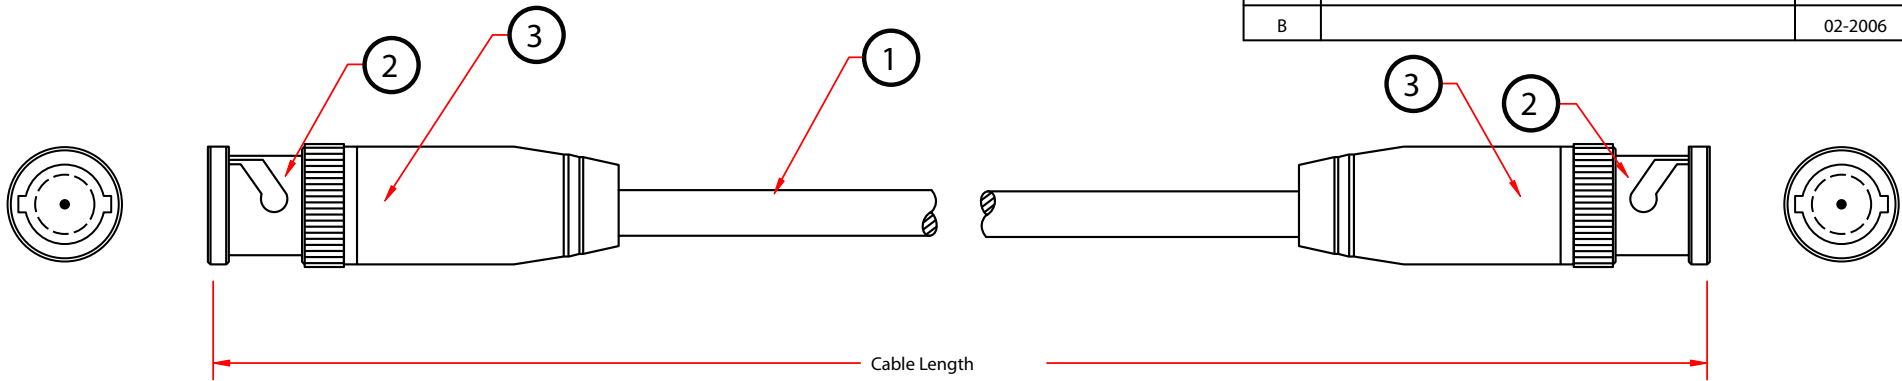

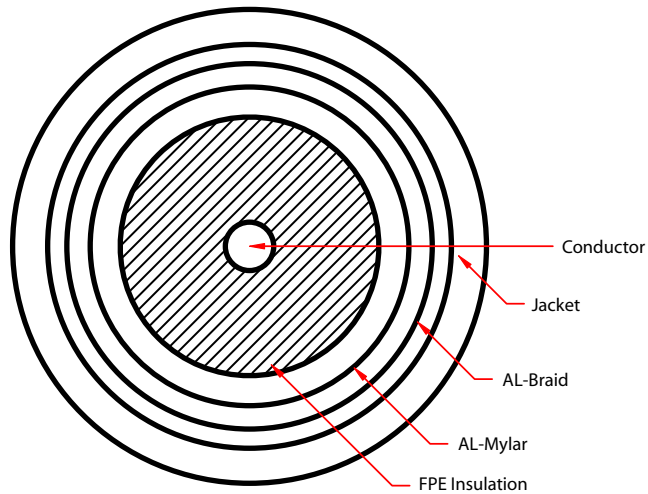

Cable Specifications:

RG6 UL AWM Style 1354 80C 30V 75 Ohms Coaxial Cable
 18AWG 1.0mm Copper Clad Steel Central Conductor
 0.18"/4.57mm OD FPE Dielectric
 0.025mm Aluminium-Polyester Foil Shield
 AL-Braid (60% Coverage)
 0.27"/6.9mm OD Black Flex PVC Jacket



PART NO.	CABLE LENGTH
10X4-02103	3 ft
10X4-02106	6 ft
10X4-02112	12 ft
10X4-02125	25 ft
10X4-02150	50 ft
10X4-02175	75 ft
10X4-021HD	100 ft

ITEM NUMBER	10X4-021xx		DRAWER	MPD
TITLE	BNC Male to BNC Male, RG6 Cable		CHECKED	MAC
			APPROVED	MAC
MATERIAL		SCALE	 	
REV.	A	UNIT		INCH

3	Black Molded PVC Hood
2	BNC Male (RG6) Nickel Plated
1	RG6 Cable, 75Ohm with AL-Mylar and 60% Aluminum Braided Shield, Black Outer PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

