


Product Specifications

REV.	DESCRIPTION	DATE
A		
B		04-2009

Construction & Material :

Item		Specification
Product		RG 6, Quad Shield, Solid Coaxial Cable
Conductor	Construction	Solid 18AWG(1.02 0.01 mm)
	Material	Copper Clad Steel
Insulation	Material	Foam PE
	Avg.thickness	1.78 mm
	Diameter	4.57 0.05 mm
Inner Shield	Material	Bonded Al-Foil
Inner-Braid	Construction	0.16mm*4*16 (60% Coverage)
	Material	Al-Mg
Outer Shield	Material	Al-Foil-Al
Outer-Braid	Construction	0.16mm*3*16 (40% Coverage)
	Material	Al-Mg
Jacket	Material	PVC
	Avg.thickness	1.12 mm
	Diameter	7.54 0.10 mm
	Color	Black

Cross Section:

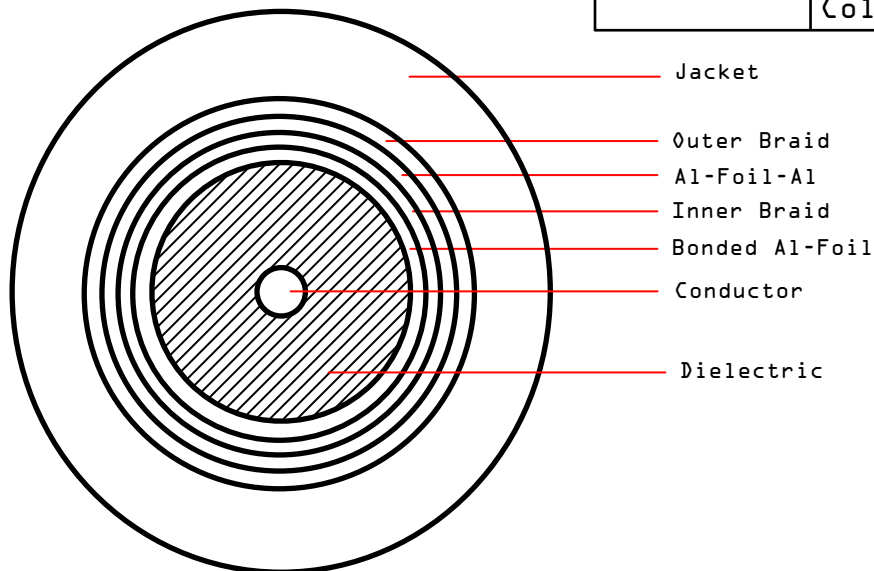

Characteristics			
Sparker Test:	4000VAC		
Impedance:	75±3 Ohm	DRAWER	LIBRA
Capacitance:	54 3pF/Ft (Nom.)	CHECKED	
Velocity of Propagation:	85%	APPROVED	
Return Loss:	20 dB min (5 - 2300 MHz)		
PART NUMBER:	TITLE:	 888-212-8295	
10X4-122TH	RG6 18AWG, Solid Quad-Shielded Coaxial Cable, Black, 1000 ft, Pullbox		