


REV.	DESCRIPTION	DATE
A		06-2016

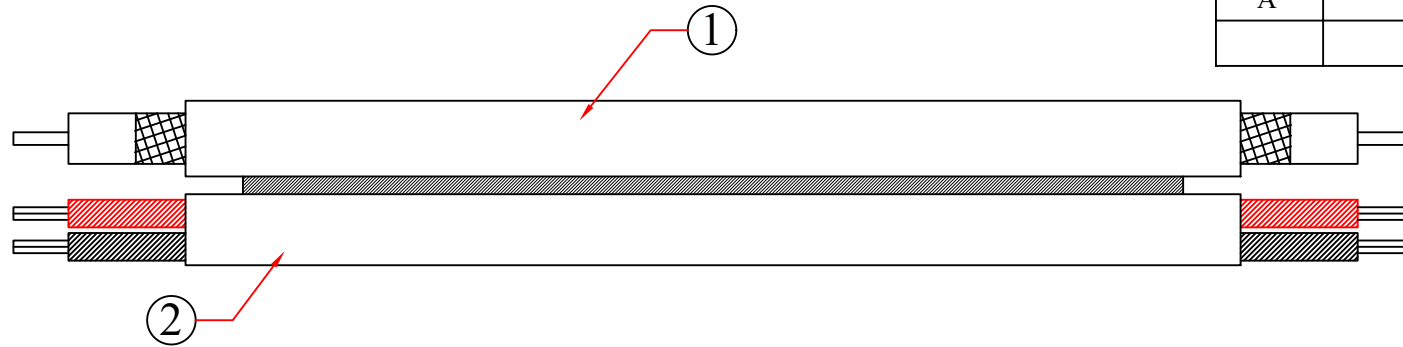


RoHS

Electricals	
Impedance	75 OHMS
Capacitance	17.3 pF/ft
Velocity of Propagation	78%


Coax Cable Specifications:

RG6/U 75 Ohm Coaxial Cable
 18AWG Solid Bare Copper Center Conductor
 AL-Mylar Foil Shield
 CCA Braid (95% Coverage)
 4.57mm OD Foam PE Dielectric
 6.9mm OD Black UV Resistant PVC Jacket

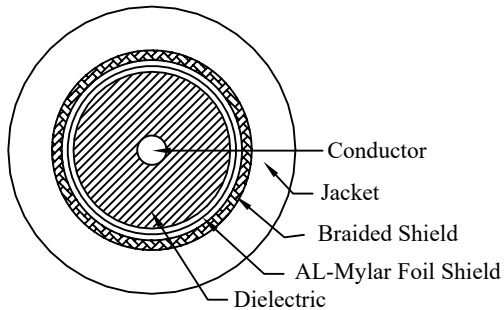

Power Cable Specifications:

2 x 18AWG Stranded Bare Copper Center Conductor
 1 Pair Black and Red Wire, Material SR-PVC
 5.0mm OD Black UV Resistant PVC Jacket

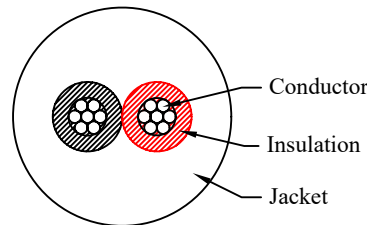

Attenuation	
MHz	dB/100ft
100	2.20
200	4.00
900	8.30

2	2x18AWG Bare Copper, Black and Red Insulation, OD:5.0mm, Black UV Resistant PVC Jacket
1	RG6/U Cable, 75 Ohm with AL-Mylar and 95% CCA Braided Shield, OD6.9mm, Black UV Resistant PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10X4-18222NH		DRAWER	JL
TITLE	Bulk RG6 Siamese Coaxial/Power Cable, Black, Solid Core (Copper), 95% Braid, 18/2(18AWG 2 Conductor) Copper Power, Spool, 1000foot		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				
ID(NO.)	204		 888-212-8295.com	