


REV.	DESCRIPTION	DATE
A		04-2106

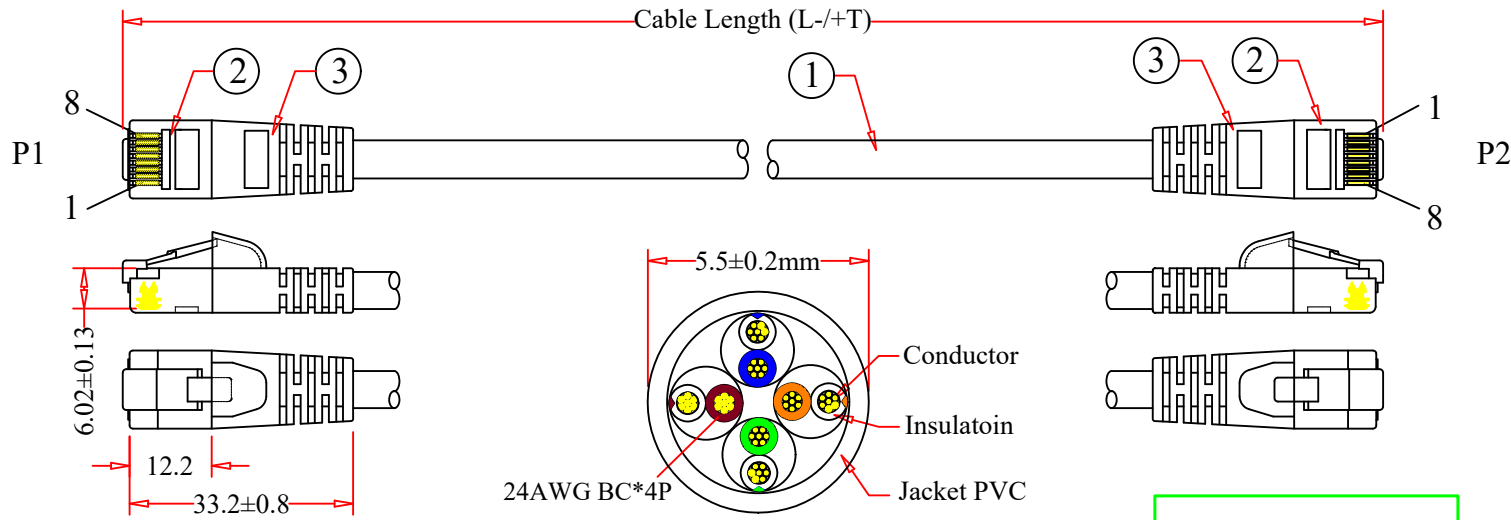

PART NO.	CABLE LENGTH	
	L	-/+T(mm)
10X6-0xx00.5	0.5 FT	-10/+30
10X6-0xx01	1 FT	-10/+30
10X6-0xx02	2 FT	-10/+30
10X6-0xx03	3 FT	-10/+30
10X6-0xx04	4 FT	-15/+50
10X6-0xx05	5 FT	-15/+50
10X6-0xx06	6 FT	-15/+50
10X6-0xx07	7 FT	-15/+50
10X6-0xx10	10 FT	-15/+50
10X6-0xx14	14 FT	-20/+50
10X6-0xx15	15 FT	-20/+50
10X6-0xx20	20 FT	-30/+60
10X6-0xx25	25 FT	-35/+75
10X6-0xx30	30 FT	-45/+90
10X6-0xx35	35 FT	-50/+100
10X6-0xx50	50 FT	-75/+150
10X6-0xx75	75 FT	-100/+200
10X6-0xxHD	100 FT	-150/+300

RoHS

Pin Assignment			
P1			P2
1	Orange		1
2	White/Orange		2
3	Green		3
6	White/Green		6
4	White/Blue		4
5	Blue		5
7	Brown		7
8	White/Brown		8

Color Options
21 Gray
22 Black
31 Orange
41 Purple
51 Green
61 Blue
71 Red
72 Pink
81 Yellow
91 White

**NOTES:**  
 1. Electrical Test:  
 (1) 100% Open Short & Miswire Test.  
 (2) Insulation Resistance 1 MΩ MIN.

3	PVC Molded Hood Boot
2	RJ45 8P8C Plug, Pin 30u" gold Plated
1	CAT5e UTP, 24AWG BC x4P, Stranded, ETL Verified, UL/CSA approved, OD: 5.5±0.2mm
NO.	SPECIFICATIONS
BOM LIST	


ITEM NUMBER	10X6-0xxxx			DRAWER	JL
TITLE	CAT5e UTP Bootless Ethernet Cable			CHECKED	
MATERIAL	SCALE			APPROVED	
REV.	A	UNIT	MM		
DRAWING NO:				 888-212-8295.com <b>CableWholesale.com</b>	
ID(NO.)	124				

# Product Specifications

REV.	DESCRIPTION	DATE
C		11-2013
D		04-2020

## Construction & Material :

Item		Unit	Specification
Product			CAT-5 E UTP 4P
Conductor	Size	AWG	24
	Number	Pairs	4
	Material		Stranded Bare Copper
	Construction	pcs / mm	7/0.196
	Diameter	mm	0.588
Insulation	Material		HD-PE
	Min.thickness	mm	0.161
	Avg.thickness	mm	0.181
	Diameter	mm	0.99
	Color		Blue-White/Blue      Orange-White/Orange Green-White/Green      Brown-White/Brown
Twisting	Construction		See Cross Section
Cabling	Construction		See Cross Section
Jacket	Material		PVC
	Min.thickness	mm	0.45
	Avg.thickness		0.55
	Overall Diameter	mm	5.50 ± 0.20
	Color		By Order
Marking	TYPE CM 75°C (UL) E188630 24AWG CSA LL81295 CMG 75°C FT4 ETL VERIFIED TIA/EIA-568 B.2 CAT.5e Patch Cable UTP		

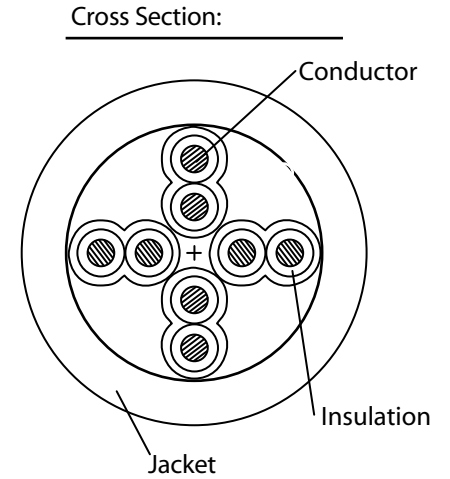


DRAWER	JL
CHECKED	MAC
APPROVED	MAC

Black Cable: White or Yellow Marking

Other Cable : Black Marking

COLORS:	PART NUMBER:	TITLE:
Gray, Black, Orange, Purple, Green, Blue, Red, Pink, Yellow, White	10X6-0xxSH	CAT-5 E UTP, 24AWG, Stranded



Electrical Property :

REV.	DESCRIPTION	DATE
B		02-2006
C		11-2013

Item		Unit	Specification			Standard		
D-C Resistance		Ωm/100M	AT 20°C			DC Max.9.3Ω		
D-C Resistance Unbalance		%	-----			Max.5		
Capacitance Unbalance		pF/100M	-----			Max.330		
Characteristic Impedance 1.0-100.0MHz		Ωm/100M	-----			100±15		
Temperature rating		°C	Celsius			-10/ +75		
Dielectric Withstand		AV/2 Sec.	1500V			No Breakdown		
Frequency MHz	Attenuation dB/100m	NEXT Pair-Pair (dB)	NEXT Power Sum (dB)	ELFEXT Pair-Pair (dB)	ELFEXT Power Sum (dB)	Structural Return Loss (dB)	Return Loss (dB)	
1	2.4	65.3	62.3	63.8	60.8	23.0	20.0	
10	7.8	50.3	47.3	43.8	40.8	23.0	25.0	
16	9.9	47.3	44.4	39.7	36.7	23.0	25.0	
20	11.1	45.8	42.8	37.7	34.7	23.0	25.0	
25	12.5	44.4	41.3	35.8	32.8	22.0	24.2	
31.25	14.1	42.9	39.9	33.9	30.9	21.1	23.3	
62.5	20.4	38.4	35.4	27.8	24.8	18.1	20.7	
100	26.4	35.3	32.3	23.8	20.8	16.0	19.0	

DRAWER	JL
CHECKED	MAC
APPROVED	MAC
