




Notes

CableWholesale Distribution Cable is composed of 2 to 24 colored tight buffers, aramid yarn, and a PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards.

CWS Distribution Cable is available in 12 TIA standard colors or special order colors. UL Listed OFNP cables are available, and unlisted, unrated cables can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print can also be accommodated.

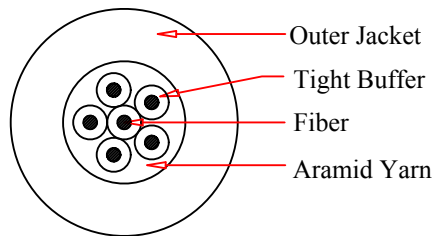

Application

Plenum

Flame Rating

NFPA262

REV.	DESCRIPTION	DATE
A		09-2014
B		06-2015

**Product Specifications**

Construction & Material :

Item	Specifications
Product	Multimode, 62.5/125
Fiber Count	6
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Available in 12 TIA/ EIA color standard
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Orange

Physical Characteristics	Value
Nominal Outer Diameter (mm)	5.30
Weight (lbs/ km)	64
Minimum Bend Radius, Installation (cm), of 6 (fiber count)	7.95
Minimum Bend Radius, Operation (cm), of 6 (fiber count)	5.30

Optical Characteristics

Items	62.5/125
Core Size	62.5 um
Wavelength	(850/ 1300) nm
Max. Attenuation	(3.5/ 1.5) dB/ Km
Bandwidth (EMB) (High Performance)	220 MHz @850nm

DRAWER	JL
CHECKED	
APPROVED	

Storage Temp	-40 °C / +70 °C		APPROVED	
Operating Temp	0 °C / +70 °C			
ID(NO.)	PART NUMBER	TITLE	 888-212-8295	
120	11F2-206NH	6 Fiber Indoor Distribution Fiber Optic Cable, Multimode 62.5/125, Plenum Rated, Orange, Spool, 1000ft		