




Features and Benefits

- 900µm Tight Buffers
- Water blocking aramid yarn strength members
- Exclusive use of Corning® optical fibers
- Jacket print ensures product identification and fiber compatibility
- Durable jacket offers added protection during installation and in rugged use applications

Description

CableWholesale, Inc. Indoor/ Outdoor Cable is composed of 2 to 24 colored tight buffered optical fibers, water blocking aramid yarn, and a UV resistant black PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards. CWS Indoor/ Outdoor Cable is available in carbon black or special order colors(including 12 TIA standard colors). UL Listed OFNP cables are available, and unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print may also be accommodated.

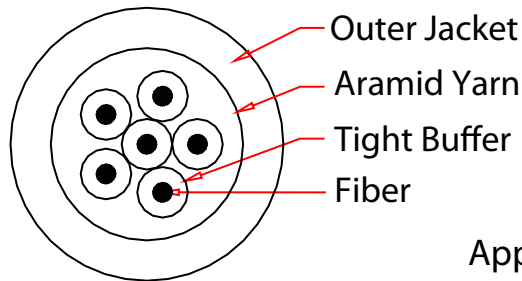

Cable Section

Application
Plenum
Duct
Indoor/Outdoor

Flame Rating
NFPA262

Product Specifications

Construction & Material :

Item	Specifications
Product	Multimode, 62.5/125, Plenum Rated
Fiber Count	6
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Carbon Blackge
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

Physical Characteristics

Value(6 Fiber Count)

Nominal Outer Diameter (mm)	4.8
Weight (lbs/ km)	57
Minimum Bend Radius, Installation (cm), of 2 (fiber count)	7.2
Minimum Bend Radius, Operation (cm), of 2 (fiber count)	4.8

Optical Characteristics

Items	62.5/125
Core Size [µm]	62.5
Wavelength [nm]	850/ 1300
Max. Attenuation[dB/km]	3.5/ 1.5
Link Length[m]	300 (1Gb/s@850nm)
Bandwidth (EMB High Performance)[MHz.km]	220 @850nm

Specifications

Temperature Range	Indoor
Storage Temperature	-40 °C / +70 °C
Operating Temperature	-40 °C / +70 °C

Rev.	Description	Date
A		09-2020

Item Number:	10F3-206NH	
Title:	6 Fiber Indoor/Outdoor Fiber Optic Cable, Multimode 62.5/125, Plenum Rated, Black, Spool, 1000ft	
Drawn by:	JL	
Approved by:	MAC	
ID:	120	

No.	Specifications
-----	----------------