

Product Specification


| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | 03-2008 |
| B | | 03-2015 |

Construction & Material


| Part Number | Color |
|-------------|-------|
| 11F7-0271TH | Red |

| Item | Specification | |
|--------------------------|-------------------------------------|-------------------------|
| Product | FPLP, Fire Alarm / Security, Plenum | |
| Conductor | Construction | Solid 2x14AWG |
| | Material | Bare Copper |
| Insulation | Material | Remguard Plenum Polymer |
| | Min.thickness | |
| | Avg.thickness | 0.330 mm |
| | Diameter | 2.286 mm |
| | Nom. Lay Length | 127 mm |
| | Color | Black and Red |
| Jacket | Material | Remguard Plenum Polymer |
| | Min.thickness | |
| | Avg.thickness | 0.381 mm |
| | Diameter | 5.334 mm |
| | Color | Red |
| Approximate Cable Weight | 36 lbs./Kft | |

Cross Section:

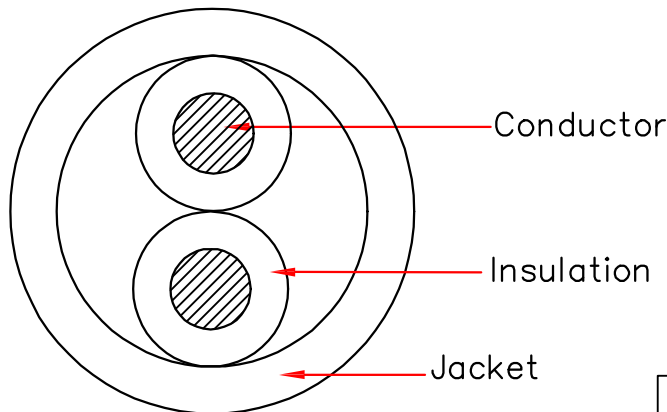

| Electrical Properties: | | DRAWER | LIBRARY |
|---------------------------------------|--------------------|----------|---------|
| Nom. DC Resistance per Conductor@20°C | 2.52 Ohms/Kft.nom. | CHECKED | |
| Capacitance Between Conductors@1KHz | 40 pF/ft.nom. | APPROVED | |
| Operating Voltage | 300 V/RMS max. | | |
| Temperature Rating | -20 °C to 60 °C | | |

| PART NUMBER: | TITLE: |  |
|--------------|---|---|
| 11F7-0271TH | 2/14 Solid FPLP Plenum Pullbox, 1000 ft | |

| ID(NO.) |
|---------|
| 204 |