

Rev.	Description	Date
A		01-2021


RoHS

Product Specifications


Construction & Material :

Item		Specifications
Product		Plenum Fire Alarm / Security Cable, FPLP
Conductor	Construction	Solid 4 x14AWG
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.28mm
	Diameter	2.20± 0.10 mm
	Color	Black, Red, White and Green
Jacket	Material	PVC
	Avg.thickness	0.43 mm
	Diameter	OD Average5.105 / Final Diameter 6.147mm
	Color	Red
Marking	STRUCTURED CABLE PRODUCTS --- P/N 14/4FPLP --- (UL) CL2P/CL3P Exxxxxx OR FPLP 75°C FT-6 UNSH 4/C 14 AWG SOLID --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Total Cable Weight		104 kg/km

Cross Section

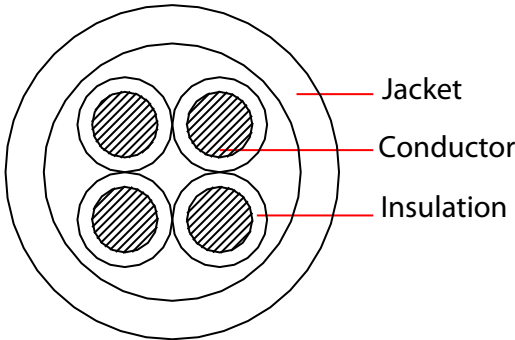

Characteristics	
Mutual Capacitance	29.9 pF/ft
DC Resistance 25°C	2.6 Ohms / 1000 ft
Impedance	62.8 Ohms
Velocity of Prop	65 %
Inductance	1.3 mH/km
Temp/Voltage	75°C / 300V
Operating Temperature	-20°C to 75°C

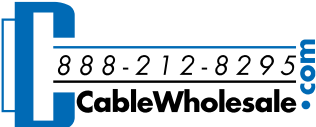Item Number:	11F7-04712NH	
Title:	Plenum Fire Alarm / Security Cable, Red, 14/4 (14 AWG 4 Conductor), Solid, FPLP, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------