


REV.	DESCRIPTION	DATE
A		01-2014

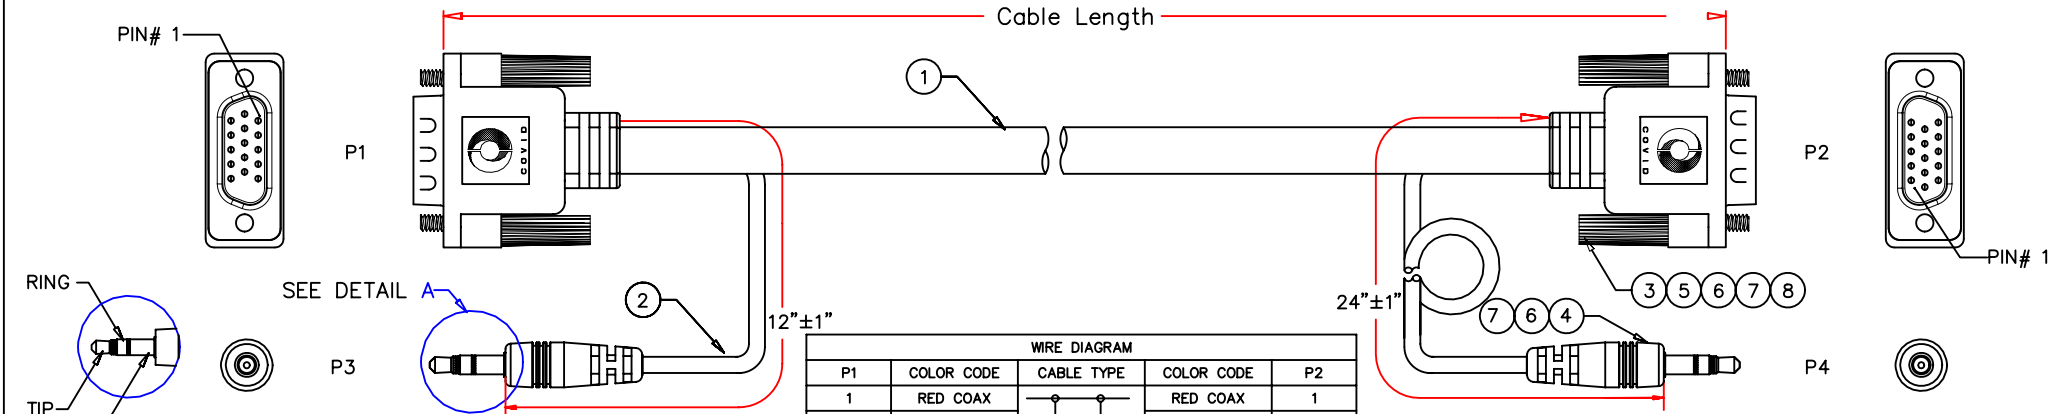

WIRE DIAGRAM				
P1	COLOR CODE	CABLE TYPE	COLOR CODE	P2
1	RED COAX	[Symbol]	RED COAX	1
6	SHIELD		SHIELD	6
2	GREEN COAX	[Symbol]	GREEN COAX	2
7	SHIELD		SHIELD	7
3	BLUE COAX	[Symbol]	BLUE COAX	3
8	SHIELD		SHIELD	8
13	BLACK COAX	[Symbol]	BLACK COAX	13
5	SHIELD		SHIELD	5
14	WHITE COAX	[Symbol]	WHITE COAX	14
10	SHIELD		SHIELD	10
4	BLACK	[Symbol]	DRAIN	4
11	RED	[Symbol]	RED	11
9	ORANGE	[Symbol]	ORANGE	9
12	YELLOW	[Symbol]	YELLOW	12
15	BROWN	[Symbol]	BROWN	15
SHELL	DRAIN	[Symbol]	DRAIN	SHELL
P3	COLOR CODE	CABLE TYPE	COLOR CODE	P4
SLEEVE	DRAIN	[Symbol]	DRAIN	SLEEVE
RING	WHITE	XXXXXX	WHITE	RING
TIP	GRAY	[Symbol]	GRAY	TIP

RoHS

PART NO.	CABLE LENGTH
11H1-29125	25 FT
11H1-29135	35 FT
11H1-29150	50 FT
11H1-29175	75 FT

3).CABLE ASSEMBLY TO BE 100% TESTED FOR SHORTS, OPENS, AND MISS WIRES. FINAL TEST WILL BE 100% HI POT AT 300 VOLTS FOR 100ms.

2).Sn SOLDER TO BE USED FOR ALL SOLDER CONNECTIONS. (Sn/Pb SOLDER IS NOT PERMITTED)

1).CABLE ASSEMBLY TO BE WIRED IN ACCORDANCE TO THE WIRE DIAGRAM.

NOTES: UNLESS OTHERWISE SPECIFIED

8	MOLDING COMPOUND, OVER-MOLD, PVC, SHORE A=91±3A ,BLACK	ITEM NUMBER	11H1-291xx		DRAWER	JL
7	MOLDING COMPOUND, PRE-MOLD,POLYETHYLENE, NATURAL		TITLE	Plenum VGA Cable w/ Audio, Black, HD15 Male + 3.5mm Male, Coaxial Construction, Shielded,		CHECKED
6	SHIELD, COPPER FOIL WHIT ADHESIVE BLACKING	MATERIAL		SCALE		APPROVED
5	HARDWARE, THUMBSCREW, #4-40, COLD ROLLED STEEL, Ni PLATING		REV.	A	UNIT	
4	CONNECTOR, 3.5MM STEREO PLUG, OVERALL NICKEL PLATING	DRAWING NO:				
3	CONNECTOR, D-SUB, HIGH DENSITY, 15-POSITION, MALE, AU FLASH PLATING ON CONTACTS, Ni PLATING ON SHELL					
2	CABLE, (1) TWISTED PAIR 28AWG, OVERALL SHIELD					
1	CABLE, 28AWG X5C COAX+1P+5C+2C, CMP					
NO.	SPECIFICATIONS					
	BOM LIST					