

RoHS


Rev.	Description	Date
A		01-2021

Product Specifications


Construction & Material :

Item		Specifications
Product		Plenum Security Cable, CMP
Conductor	Construction	Stranded 6 x22AWG(7/0.25mm)
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.20mm
	Diameter	1.10± 0.05 mm
	Color	Black, Red, White, Green, Brown, Blue
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	OD Average 3.302 / Final Diameter 4.064 mm
	Color	White
Marking	STRUCTURED CABLE PRODUCTS --- P/N 22/8P --- (UL) CL2P/CL3P Exxxxxx OR FPLP 75°C (UL) C(UL) CMP FT-6 UNSH 8/C 22 AWG --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Package Weight		22.50 lbs / 10.23 kgs

Cross Section

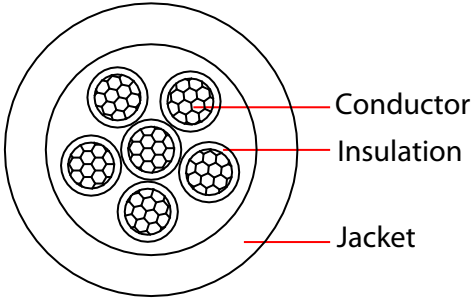

Characteristics	
Mutual Capacitance	20.8 pF/ft
DC Resistance 25°C	16.1 Ohms / 1000 ft
Impedance	84.4 Ohms
Velocity of Prop	63 %
Inductance	1.3 mH/km
Temp/Voltage	75°C / 300V
Operating Temperature	-20°C to 75°C

Item Number:	11K4-06912MH	
Title:	Plenum Security Cable, White, 22/6 (22 AWG 6 Conductor), Stranded, CMP, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------