

REV.	DESCRIPTION	DATE
A		04-2014


Product Specifications

Construction & Material :

Item		Specifications
Product		UL CMP Speaker Cable
Conductor	Construction	22AWG (7 Strand)
	Material	Bare Copper
Insulation	Material	LS-PVC
	Avg.thickness	0.24mm
	Diameter	1.2 ± 0.10 mm
	Color	Red , Black, White, Green,Brown, Blue, Orange, Yellow
Jacket	Material	LS-PVC
	Avg.thickness	0.42 mm
	Diameter	4.5 ± 0.20 mm
	Color	White
Marking	Exxxxxx CMP/CL3P/FPLP 22AWG (UL) c(UL) MADE IN USA RoHS COMPLIANT	

RoHS

Cross Section

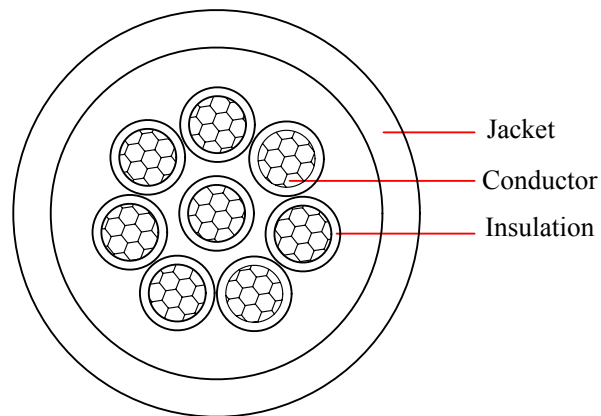

Characteristics			
Capacitance	22 pF/ft Nom.		
Vel of Prop	55%		
Impedance	84 OHMS	DRAWER	JL
Temp/Voltage	75 DEG C / 300V	CHECKED	
Resisance	17.5 OHMS D.C. PER 1000 FT @ 68 DEG. F Maximum	APPROVED	
PART NUMBER	TITLE	⊕	⊖
11K4-0891SH	Plenum Security Cable, White, 22/8 (22 AWG 8 Conductor), Stranded, CMP, Pullbox, 1000 foot	