


Rev.	Description	Date
A		10-2018

Product Specifications

Construction & Material :

Item		Specifications
Product		UL CMP Security Cable
Conductor	Construction	Stranded 22AWG
	Material	Bare Copper
Insulation	Material	Polyvinyl Chloride (PVC)
	Avg.thickness	0.18mm
	Diameter	1.10 ± 0.10 mm
	Color	Black, Natural
Drain	Material	Stranded Tinned Copper
Shield	Material	AL/Foil
Jacket	Material	Polyvinyl Chloride (PVC)
	Avg.thickness	0.38 mm
	Diameter	2.85 ± 0.15 mm
	Color	White
Approx.Wt.	lb./1000ft	12


Cross Section

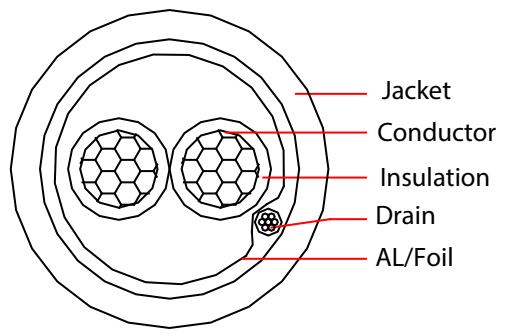

RoHS

Characteristics

Temperature: 75°C

Item Number:	11K4-5291MH	
Title:	Shielded Plenum Security Cable, White, 22/2 (22 AWG 2 Conductor), Stranded, CMP, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	158	

No.	Specifications
-----	----------------