


RoHS

Cross Section

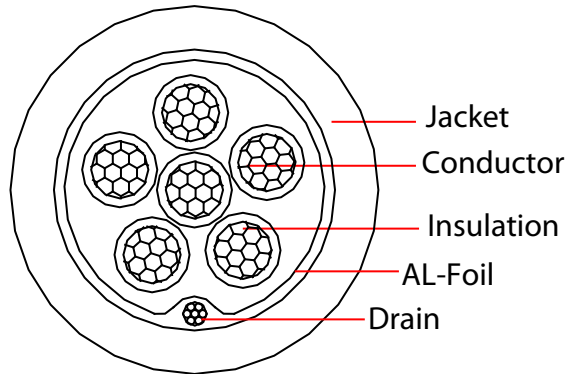


Characteristics	
Mutual Capacitance	42.6 pF/ft
Cond to Shield Cap.	86.9 pF/ft
DC Resistance 25°C	15.8 Ohms / 1000 ft
Impedance	61.7 Ohms
Velocity of Prop	60 %
Inductance	1.3 mH/km
Temp/Voltage	75°C / 300V
Operating Temperature	-20°C to 75°C

Product Specifications

Rev.	Description	Date
A		01-2021

Construction & Material :

Item		
Product		Shielded Plenum Security Cable, CMP
Conductor	Construction	Stranded, 6 x22AWG(7/0.25mm)
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.20mm
	Diameter	1.10± 0.05 mm
	Color	Black, Red, White, Green, Brown, Blue
Shield	Material	AL-Foil
Drain	Construction	24AWG(7 Strand)
	Material	Tinned Copper
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	OD Average 3.429 / Final Diameter 4.115mm
	Color	White
Marking	STRUCTURED CABLE PRODUCTS --- P/N 22/6SHP --- (UL) CL2P/CL3P Exxxxxx OR FPLP 75°C (UL) C(UL) CMP FT-6 SHIEDED 6/C 22 AWG --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Package Weigth		24 lbs / 10.91 kgs

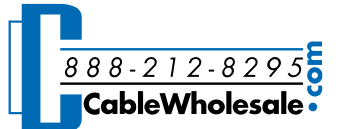Item Number:	11K4-56912MH	
Title:	Shielded Plenum Security Cable, White, 22/6 (22 AWG 6Conductor), Stranded, CMP, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	