


# RoHS

## Product Specifications

Rev.	Description	Date
A		01-2022

### Construction & Material :


### Cross Section

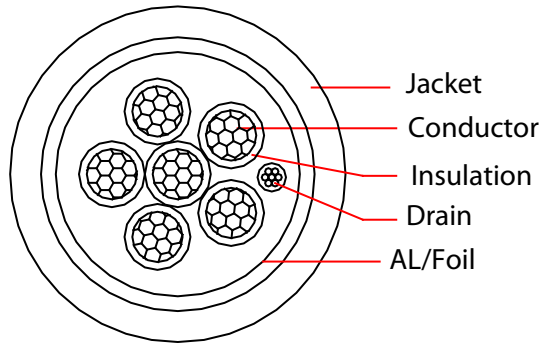

Item		Specifications
Product		UL CMP Speaker Cable
Conductor	Construction	Stranded 22AWG(7/0.25mm)
	Material	Bare Copper
Insulation	Material	PVC Plenum
	Avg.thickness	0.20mm
	Diameter	1.10 ± 0.10 mm
	Color	Red , Black, Natural, Green,Brown, Blue
Drain	Material	24AWG Strand STC Cond.
Shielded	Material	AL/Foil
Jacket	Material	PVC Plenum
	Avg.thickness	0.38 mm
	Diameter	3.43±0.2mm
	Color	White
Marking	STRUCTURED CABLE PRODUCTS --- P/N 22/6SHP --- (UL) CL2P/CL3P Exxxxxx OR FPLP 75°C (UL) C(UL) CMP FT-6 SHIELED 6/C 22AWG --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Package Weight		12.0 lbs/5.45 kgs

### Characteristics

DC Resistance 25°C	15.8 Ohms/1000 ft
Mutual Capacitance	42.6 pF/ft
Cond to Shield Cap.	79.2 pF/ft
Inductance.	1.3 mH/km
Impedance	61.7 Ohms
Velocity of Prop	60%
Max Voltage	300V
Operation Temperature	-20°C to +75°C

Item Number:	11K4-56912SF	
Title:	Shielded Plenum Security Cable, White, 22/6 (22 AWG 6 Conductor), Stranded, CMP, Pullbox, 500 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	