

REV.	DESCRIPTION	DATE
A		03-2015


Product Specifications

Construction & Material :

Item		Specifications
Product		UL CMP Speaker Cable
Conductor	Construction	Stranded 18AWG
	Material	Bare Copper
Insulation	Material	Remguard Plenum Polymer
	Avg.thickness	0.18mm
	Diameter	1.52 ± 0.10 mm
	Color	Black, Red, Natural, Green, Brown, Blue
Jacket	Material	Remguard Plenum Polymer
	Avg.thickness	0.38 mm
	Diameter	5.33 ± 0.2 mm
	Color	White
Marking	xxxxxxx CMP 18AWG C(ETL)US FT6 + Sequential Footage Marking	

RoHS

Cross Section

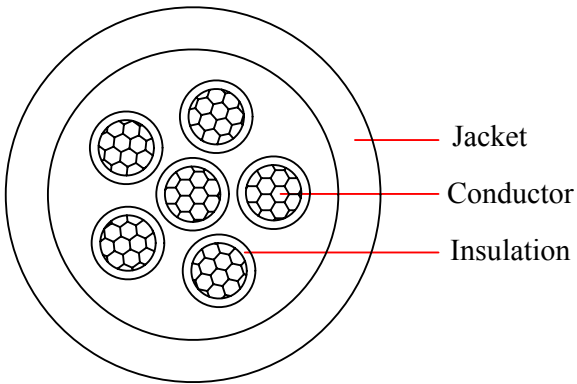

Characteristics			
Capacitance	25.4 pF/ft Nom.		
Vel of Prop	55%		
Impedance	73 OHMS	DRAWER	JL
Temp/Voltage	300 Volts, rms	CHECKED	
Operation	20°C to +60°C	APPROVED	
		⊕	⊖
PART NUMBER	TITLE		
ID(NOI.) 204	11K5-0691SH	Plenum Security Cable, White, 18/6 (18 AWG 6 Conductor), Stranded, CMP, Pullbox, 1000 foot	

