


Rev.	Description	Date
A		02-2019

### Cross Section

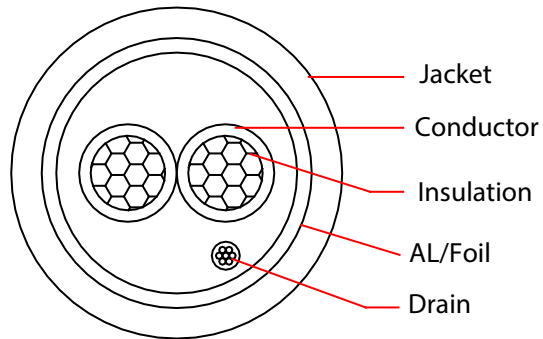


RoHS

Characteristics	
Mutual Capacitance	77 pF/ft Nom.
Velocity of Prop	58%
Impedance	32 OHMS
Temp/Voltage	300 Volts, 75°C
Operation Temperature	-20°C to +75°C
DC Resistance 25°C	7 Ohms/1000 ft

### Product Specifications

Construction & Material :

Item		Specifications
Product		UL CMP Speaker Cable
Conductor	Construction	18 AWG (7 Strand )
	Material	Bare Copper
Insulation	Material	PVC Plenum
	Avg.thickness	0.20mm
	Diameter	1.10 ± 0.10 mm
	Color	Red & Black
Drain	Material	24AWG Stranded Tinned Copper
Shielded	Material	AL/Foil
Jacket	Material	PVC Plenum
	Avg.thickness	0.38 mm
	Diameter	2.54 ± 0.15 mm
	Color	White
Marking	STRUCTURED CABLE PRODUCTS---P/N 18/2SHP---(UL) CL2P/CL3P Exxxxxx OR FPLP 75°C (UL) C(UL) CMP FT-6 SHIELDED 2/C 18AWG ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	
Total Cable Weight		22 lbs/1000ft

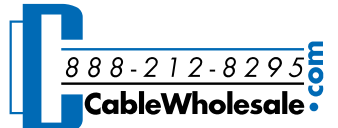Item Number:	11K5-5291MH	
Title:	Shielded Plenum Security Cable, White, 18/2 (18 AWG 2 Conductor), Stranded, CMP, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------