

# Product Specification


REV.	DESCRIPTION	DATE
A		03-2008
B		03-2015

## Construction & Material

Part Number	Color
11K5-5291SH	White

Item		Specification
Product		CMP, Security, Shielded, Plenum
Conductor	Construction	Stranded 2X18AWG(7/26AWG)
	Material	Bare Copper
Insulation	Material	Remguard Plenum Polymer
	Min.thickness	
	Avg.thickness	0.18 mm
	Diameter	1.52 mm
	Nom. Lay Length	89 mm
	Color	Black and Natural
Shield	Material	AL-Mylar
Drain Wire	Material	Stranded Tinned Copper
Jacket	Material	Remguard Plenum Polymer
	Min.thickness	
	Avg.thickness	0.38 mm
	Diameter	3.91 mm
	Color	White
Approximate Cable Weight		19 lbs./Kft

Cross Section:

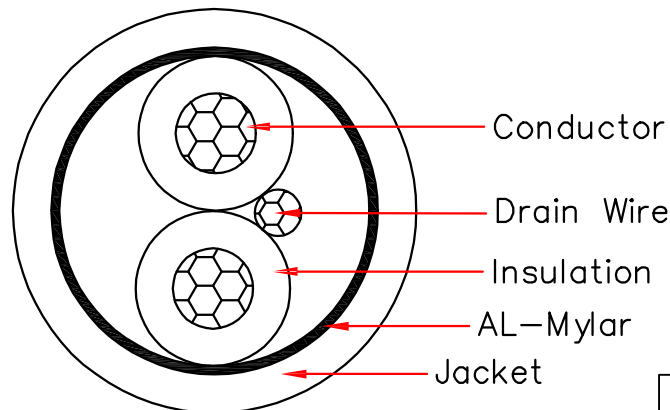

Electrical Properties:			
Nom. DC Resistance per Conductor@20°C	6.43 Ohms/Kft.nom.		
Capacitance Between Conductors@1KHz	60 pF/ft.nom.	DRAWER	JL
Capacitance Between Conductors to Shield@1KHz	108 pF/ft.nom.	CHECKED	
Operating Voltage	300 V/RMS max.	APPROVED	
Temperature Rating	-20 °C to 60 °C		

ID(NO.)	PART NUMBER:	TITLE:
204	11K5-5221SH	2/18 Stranded Shielded Plenum CMP, Pullbox, 1000 ft

