


# RoHS

Attenuation	
MHz	dB/100ft
100	2.8
200	4.1
400	6.3
700	9.2

### Cross Section

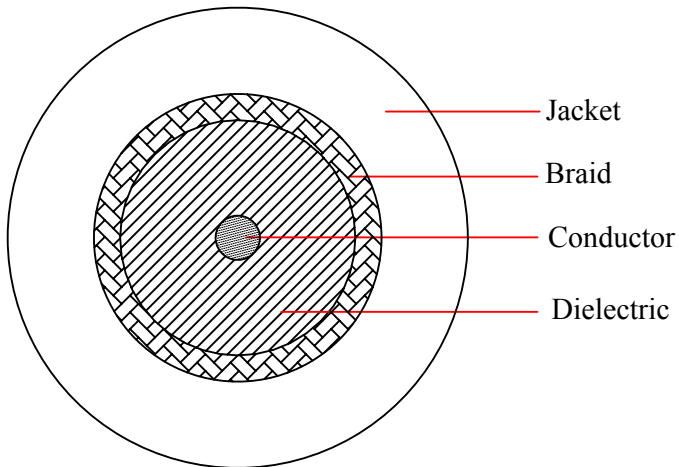

REV.	DESCRIPTION	DATE
A		05-2014

### Product Specifications

Construction & Material :

Item		Specifications
Product		CMP RG59 Coaxial Cable
Conductor	Construction	Solid 20AWG
	Material	Bare Copper
Dielectric	Material	Foamed FEP (Teflon)
	Avg.thickness	1.28 mm
	Diameter	3.4± 0.10 mm
Braid	Construction	95% Coverage
	Material	Copper Clad Aluminum
Jacket	Material	Remguard Plenum Polymer
	Avg.thickness	0.85 mm
	Diameter	5.10 ± 0.15 mm
	Color	White
Marking	xxxxxxx CMP RG59/U 20AWG C(ETL)US FT6 + Sequential Footage Marking	

Characteristics		DRAWER	JL
Capacitance	17.3 pF/ft Nominal	CHECKED	
Impedance	75±3 Ohm	APPROVED	
Velocity of propagation	78%		
PART NUMBER	TITLE		
11X3-091TH-20	Plenum Bulk RG59 Coaxial Cable, White, CMP, 20 AWG, Pullbox, 1000 foot	 888-212-8295.com	