


REV.	DESCRIPTION	DATE
A		03-2015

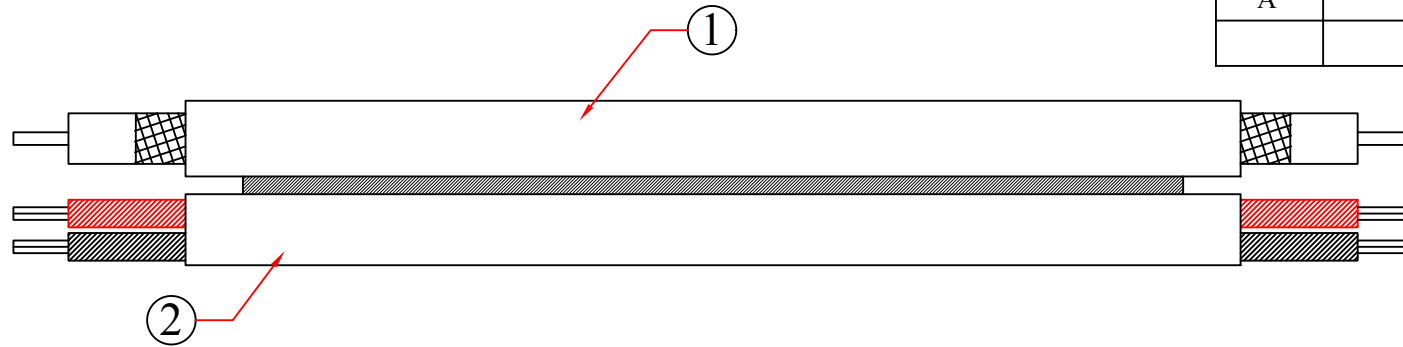


RoHS

Electricals	
Impedance	75 OHMS
Capacitance	17.3 pF/ft
Velocity of Propagation	78%


Coax Cable Specifications:

RG59/U 75 Ohm Coaxial Cable
 20AWG Solid Bare Copper Center Conductor
 AL-Mylar Foil Shield
 CCA Braid (95% Coverage)
 3.40mm OD Foamed FEP Dielectric
 5.0mm OD Black PVC Jacket

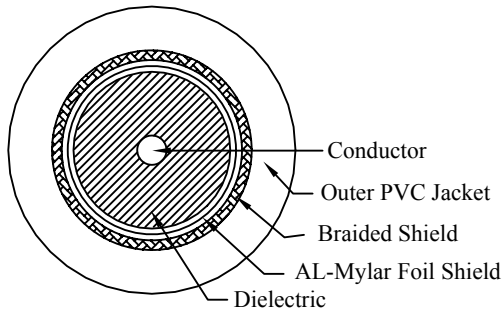




Power Cable Specifications:

2 x 18AWG Stranded Bare Copper Center Conductor
 1 Pair Black and Red Wire, Material: Remguard Plenum Polymer
 4.80mm OD White, Jacket: Remguard Plenum Polymer

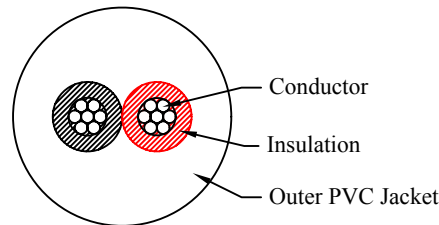

Attenuation	
MHz	dB/100ft
100	2.20
200	4.00
900	8.30

2	2x18AWG Bare Copper, Black and Red Insulation, OD.4.8mm, Outer Jacket: Remguard Plenum Polymer, White
1	RG59/U Cable, 75 Ohm with AL-Mylar and 95% CCA Braided Shield, OD5.0mm, Outer Jacket: Remguard Plenum Polymer, White
NO.	SPECIFICATIONS

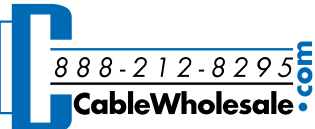ITEM NUMBER	11X3-18291NF		DRAWER	JL
TITLE	Plenum Bulk RG59 Siamese Coaxial/Power Cable, 18/2 Solid Power, CMP, White, Spool, 500 foot		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				
ID(NO.)	204			

BOM LIST