


RoHS

Attenuation	
MHz	dB/100ft
100	2.8
200	4.1
400	6.3
700	9.2

Cross Section

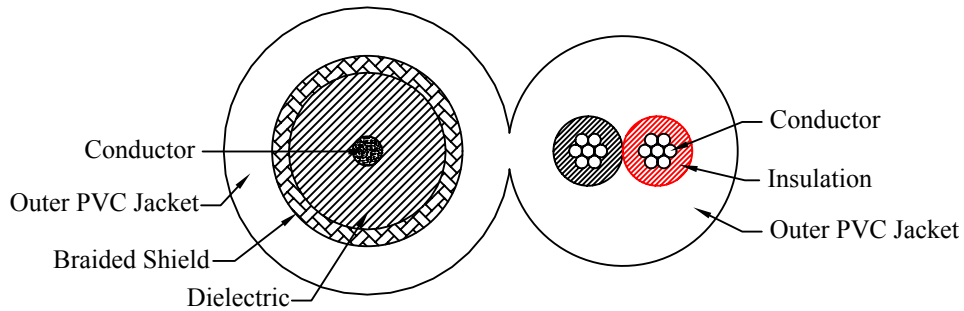

REV.	DESCRIPTION	DATE
A		04-2014

Product Specifications

Construction & Material :

Item		Specifications	
Product		CMP RG59 Coaxial Cable	CMP Power Cable
Conductor	Construction	Solid 20AWG	Stranded 18AWG*2C
	Material	Bare Copper	Bare Copper
Dielectric	Material	Foamed FEP (Teflon)	Remguard Plenum Polymer
	Avg.thickness	1.28 mm	0.34 mm
	Diameter	3.4± 0.10 mm	1.7± 0.10 mm
Braid	Construction	95% Coverage	/
	Material	Copper Clad Aluminum	/
Jacket	Material	Remguard Plenum Polymer	
	Avg.thickness	0.85 mm	1.10 mm
	Diameter	5.00 (±0.15)+4.90(±0.15)mm	
	Color	White	
RG59/U Marking	xxxxxxx CMP RG59/U 20AWG C(ETL)US FT6 + Sequential Footage Marking		

Characteristics		DRAWER	JL
Capacitance	16.3 pF/ft Nominal	CHECKED	
Impedance	75±3 Ohm	APPROVED	
Velocity of propagation	83%		
PART NUMBER	TITLE	 888-212-8295.com CableWholesale.com	
11X3-091TH-20	Plenum Bulk RG59 Siamese Coaxial/ Power Cable(18/2), White, Solid Core, CMP, Spool, 1000		