

RoHS


REV.	DESCRIPTION	DATE
A		05-2016

**Product Specifications**

Construction & Material :

Item		Specifications
Product		RG 6 Coaxial Cable,CL2P /CMP
Conductor	Construction	Solid 18AWG
	Material	Bare Copper
Dielectric	Material	FFEP-FOAMED (CELLULAR)
	thickness	0.065 INCH
	Diameter	0.170 INCH
Shielded	Material	AL/FOIL
Braid	Construction	95% Coverage
	Material	Bare Copper
Jacket	Material	FRPVC-SMOKE-GUARD OR FLAME RETARDANT PVC
	Diameter	0.225 INCH
	Color	White
SPEC/STND: NEC		UL LISTED ART 725 CL2 PLENUM
Rating		CL2P, CMP
Appox. Ship Weight (lbs.)		43

Cross Section

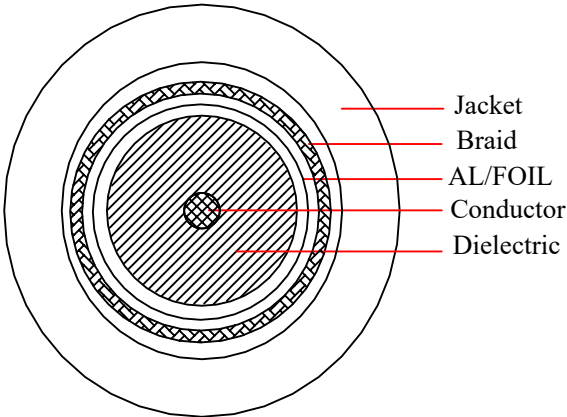

Characteristics	
Capacitance	15.8 pF/ft Nom.
Vel of Prop	84%
Impedance	75 OHMS
Attenuation	RG6 are 3GHz swept tested
PART NUMBER	TITLE

DRAWER	JL
CHECKED	
APPROVED	
⊕	⊖

ID(NO.): 126	11X4-091TH	Rg6 18AWG Solid Bare Copper 95% Bare Copper Braid Plenum White, Pullbox, 1000 foot
--------------	------------	--

