



REV.	DESCRIPTION	DATE
A		08-2015
B		

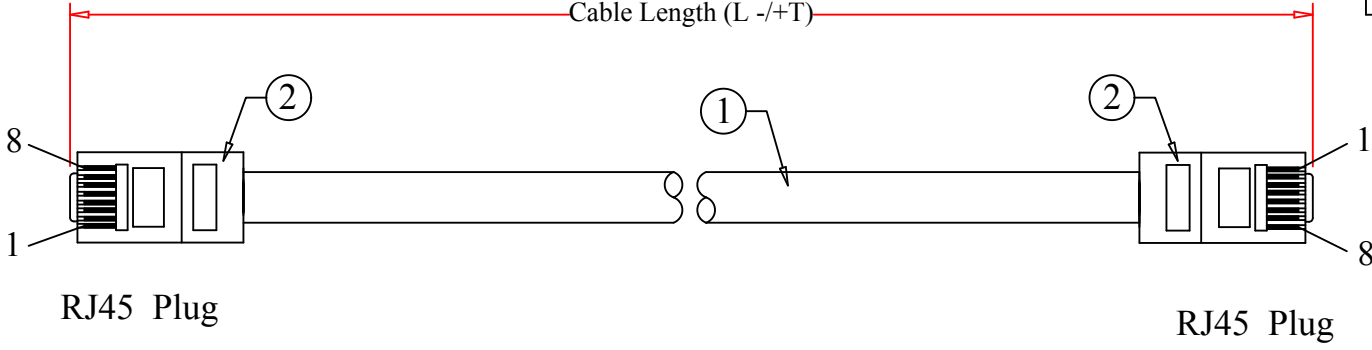

PART NO.	CABLE LENGTH	
	L	+/-T(mm)
11X6-12101	1 FT	-10/+30
11X6-12103	3 FT	-10/+30
11X6-12105	5 FT	-15/+50
11X6-12107	7 FT	-15/+50
11X6-12110	10 FT	-15/+50
11X6-12114	14 FT	-20/+50
11X6-12125	25 FT	-35/+75
11X6-12150	50 FT	-75/+150
11X6-12175	75 FT	-100/+200
11X6-121HD	100 FT	-150/+300
11X6-121150	150 FT	-150/+300

**Notes**

- 1. Electrical Test:
- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance 1 MΩ MIN.
- (3) Voltage Rating: 300V

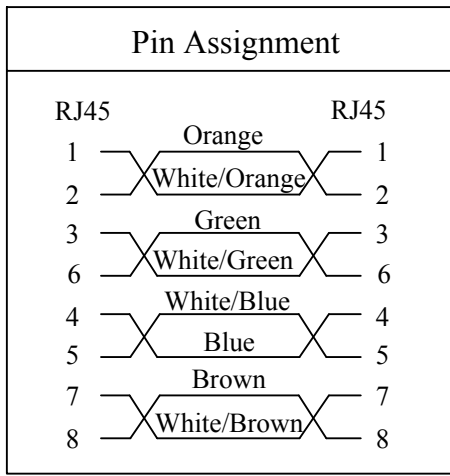

RoHS

2	RJ45 8P8C Plug, Pin 30u" Gold Plated
1	Plenum Cat5e UTP 24AWG x 4P Stranded, UL/CSA approved, OD: 5.5mm, CMP, Color: Gray
NO.	SPECIFICATIONS
	BOM LIST


ITEM NUMBER	11X6-121xx	DRAWER	JL
TITLE	Plenum Cat5e Gray Ethernet Patch Cable, CMP, 24 AWG, Bootless	CHECKED	
MATERIAL	SCALE	APPROVED	
REV.	A	UNIT	INCH
DRAWING NO:	1 OF 2		
ID(NO.)	ID(NO.)		

REV.	DESCRIPTION	DATE
A		08-2015

Construction & Material :

Item		Unit	Specification
Product			CAT.5e UTP 4P CMP Rated
Conductor	Size	AWG	24
	Number	pairs	4
	Material		Bare Copper
	Construction	pcs/mm	7/0.20
Insulation	Material		FEP
	Min.thickness	mm	0.161
	Avg.thickness	mm	0.181
	Diameter	mm	0.98±0.05
Color			Blue-White/Blue    Orange-White/Orange Green-White/Green    Brown-White/Brown
Twisting	Construction		See Cross Section
Cabling	Construction		See Cross Section
Jacket	Material		CMP-PVC
	Min.thickness		0.45
	Avg.thickness	mm	0.55
	Overall Diameter	mm	5.50±0.20
	Color		Grey
Jacket	EXXXXXX (UL) & CMP FT6 350MHZ VERIFIED TO TIA/EIA-568-B.2 24AWG 4PR CAT.5E UTP *****FT		

RoHS

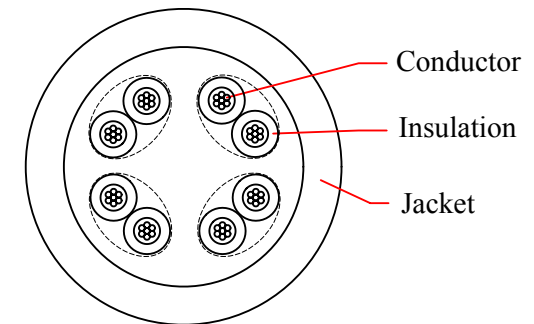

DRAWER	JL
CHECKED	
APPROVED	
DRAWING NO:	2 OF 2

PART NUMBER:	TITLE:
11X6-121TH	CAT.5e UTP 24AWG Stranded, CMP

