



REV.	DESCRIPTION	DATE
A		02-2016
B		

Product Specifications

Construction & Material :

Item	Specifications
Product	Multimode, 62.5/125
Fiber Count	6
Overall Jacket Material	Poly Vinyl Chloride
Inner Jacket Material	Poly Vinyl Chloride
Armoring Material	Aluminum
Outer Jacket Color	Orange

Physical Characteristics	Standards/ Value
Nominal Outer Diameter (mm)	13.0
Bend Radius (cm)	26.0
Weight (lbs/ km)	344


Optical Characteristics

Items	InfiniCor 300
Core Size	62.5 um
Wavelength	(850/ 1300) nm
Max. Attenuation	(3.5/ 1.5) dB/ Km
Bandwidth (EMB) (High Performance)	220 MHz @850nm

Notes

CWS Tight Buffered Aluminum Interlocking Armored cable consists of PVC overall jacket, PVC inner jacket with 2 to 24 tight buffered fiber surrounded by yarn acting as a strength member.

The core is protected by a spirally-wrapped aluminum strip that offers easy installation and high crush resistance. These cables are available in OFCP rated constructions.

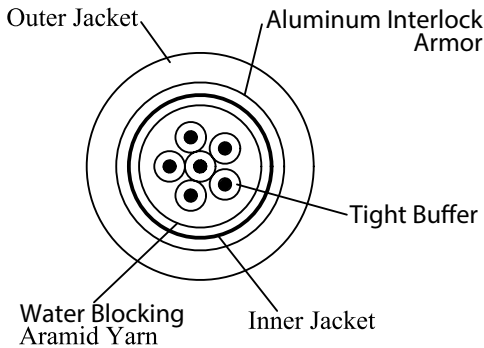

Application

Plenum , Duct

Flame Rating

NFPA262

			DRAWER	JL
Temperature Range	Indoor	Indoor / Outdoor	CHECKED	
Storage Temp	-40 °C / +70 °C	-40 °C / +70 °C	APPROVED	
Operating Temp	0 °C / +70 °C	-40 °C / +70 °C	⊕	⊖
ID(NO.)	PART NUMBER	TITLE		
120	13F2-206NF	6 Fiber Indoor Distribution Interlocking Armored Fiber Optic Cable, Multimode 62.5/125, Plenum Rated, Orange, Spool,500ft		