
Item		Specification	
Conductor	AWG	24 AWG 18 AWG	
	Material	Bare Copper	CCS
Insulation	Min. Avg. Thick	0.21mm	1.78mm
	Material	PE	FPE
	O.D.	0.93±0.03mm	4.57±0.08mm
1st AL-My;ar	Size	/	25% Overlap
	Material	/	Aluminium
1st Braid	Size	/	/
	Coverage	/	>=60%
2nd AL-My;ar	Size	/	25% Overlap
	Material	/	Aluminium
2nd Braid	Size	/	/
	Coverage	/	>=40%
	Min. Avg. Thick	0.53mm	0.68mm
Inner Jacket	Material	PVC	PVC
	Color	Blue and Gray	White and Black
	O.D.	5.00±0.20mm	7.50±0.20mm
Jacket	Min. Avg. Thick	0.90mm	
	Material	PVC(CM Rated)	
	Color	Blue	
	O.D.	17.0±0.50mm	
	Rating	300V 75 DEG C	

REV.	DESCRIPTION	DATE
В		11-2010
С		06-2014



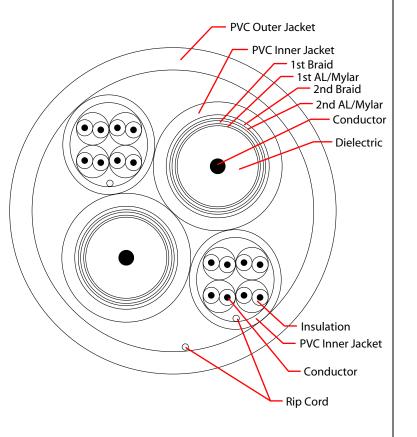

2 X CA	2 X CAT.5E	
Nom. Imp.	100 Ohms	
Nom. Velocity	72%	
Working Voltage	150V	

2 X RG6/U Quad Coax		
Nom. Imp.	75 Ohms	
Nom. Velocity	83%	
Working Voltage	300V	

DRAWER	JL
CHECKED	
APPROVED	
\rightarrow	\Box

	PART NUMBER:	TITLE:
14X4-		Bulk Cable, 2 x CAT5E + 2 x RG6
	14X4-061NF	Quad Shield, Blue Outer
		Jacket, 500ft

