


Rev.	Description	Date
A		01-2024

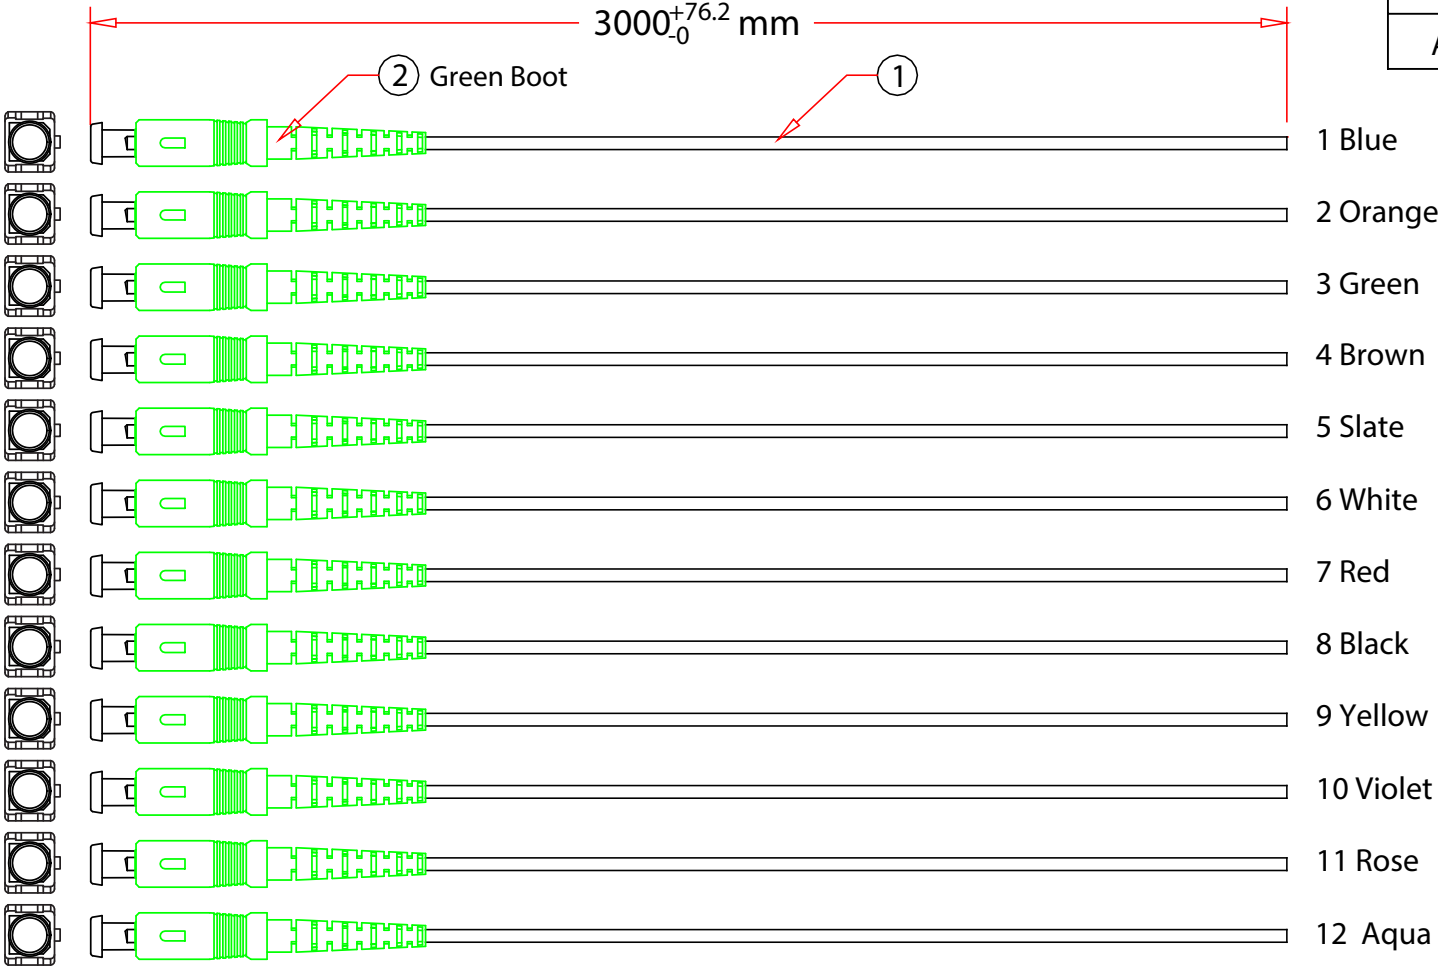

RoHS


Pin Assignment	
Side A	Open
1	Blue
2	Orange
3	Green
4	Brown
5	Slate
6	White
7	Red
8	Black
9	Yellow
10	Violet
11	Rose
12	Aqua

Notes:
 Insertion Loss: 0.3dB (max)
 Back Reflection: -65dB
 Operating Temperature: -20 to +70°C
 Storage Temperature : -40 to +70°C

Side A

Open

900µm Pigtails Packs are designed for high fiber count splicing applications and are color coded to TIA-598-A industry standards for ease of use. All pigtails feature low insertion loss, low back reflection and are made with Corning® fiber. Standard length of 3 meters.

Item Number:	15F1-00212	
Title:	12 Strand Fiber Pigtail, 9/125 Singlemode (Green Boot), SC/APC, 3 meter	
Drawn by:	MNM	
Approved by:	MAC	
ID:	269	

2	Fiber Type: Corning® SMF28 Ultra, Green Boot
1	Singlemode, Buffer Style: 900µm Tight Buffer , Material: PVC, 12 Fiber Buffer Colors: Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
No.	Specifications