


| REV. | DESCRIPTION | DATE |
|------|--|---------|
| A | | |
| B | | 04-2009 |
| C | Corrected Connector Name on Spec to Straight | 06-2019 |

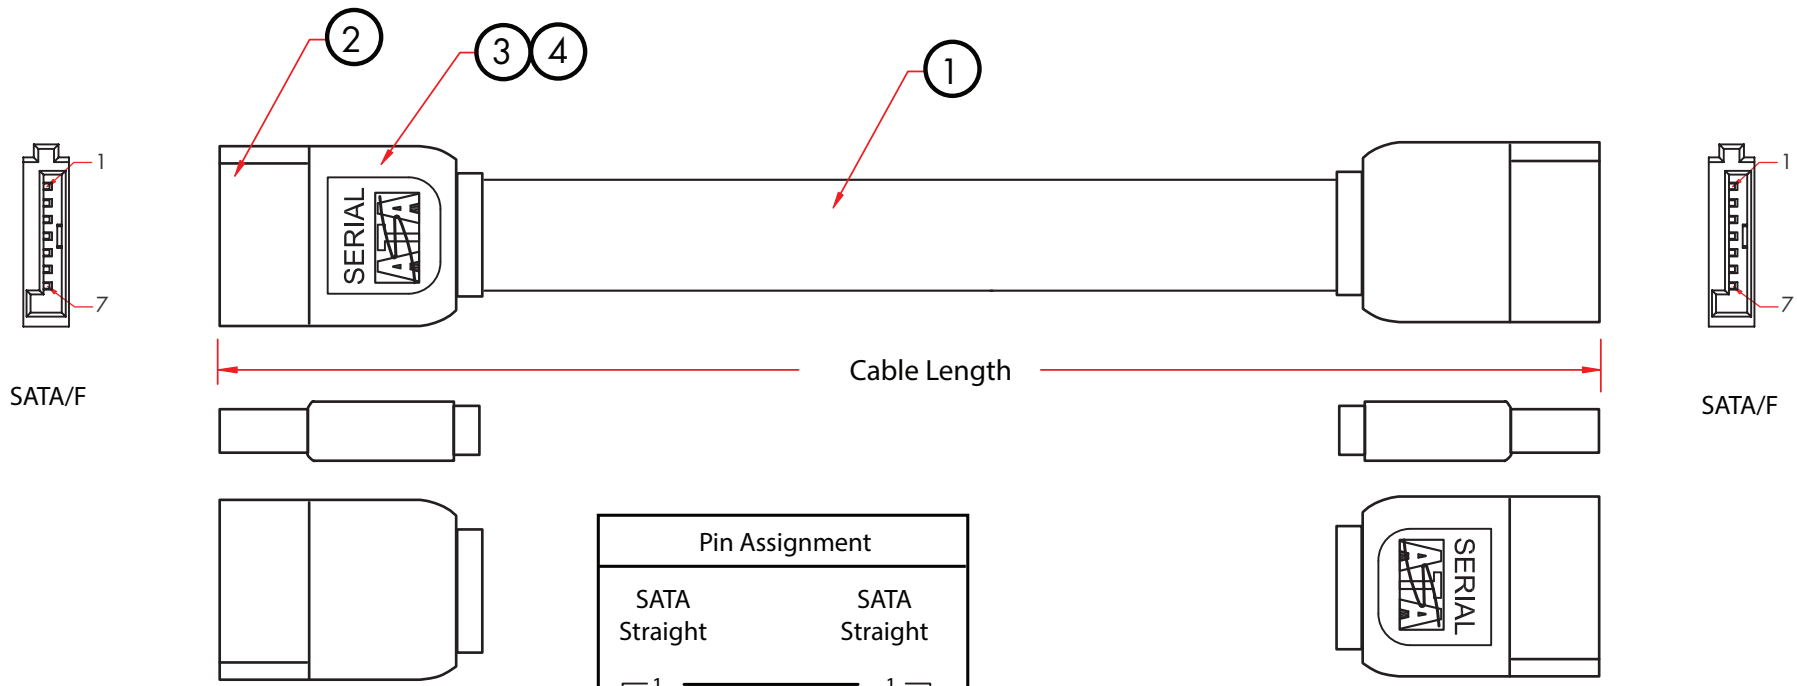

| Pin Assignment | |
|----------------|---------------|
| SATA Straight | SATA Straight |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |

| PART NO. | CABLE LENGTH |
|------------|--------------|
| 21SA-0005M | 0.5M |
| 21SA-001M | 1M |

| NO. | SPECIFICATIONS |
|----------|--|
| 4 | PVC Overmolded, Color: Black |
| 3 | LDPE Covering |
| 2 | Serial ATA Female Connector, PBT |
| 1 | AWM 2725 (2Cx26AWG Solid Tinned Copper+ Drain 2Cx26AWG Solid Tinned Copper, w/AL-Foil)*2 + 85% Coverage Braid 16/8/0.1mm Tinned Copper,Pink Outer PVC Jacket |
| BOM LIST | |

| ITEM NUMBER | 21SA-0xxx | | DRAWER | LIBRA |
|-------------|--|------|----------------------|-------|
| TITLE | Serial ATA (SATA) Cable, 150Mbps, Internal | | CHECKED | |
| MATERIAL | SCALE | | APPROVED | |
| REV. | A | UNIT | INCH | |
| DRAWING NO: | | | 888-212-8295.com | |