


REV.	DESCRIPTION	DATE
A		
B		05-2009

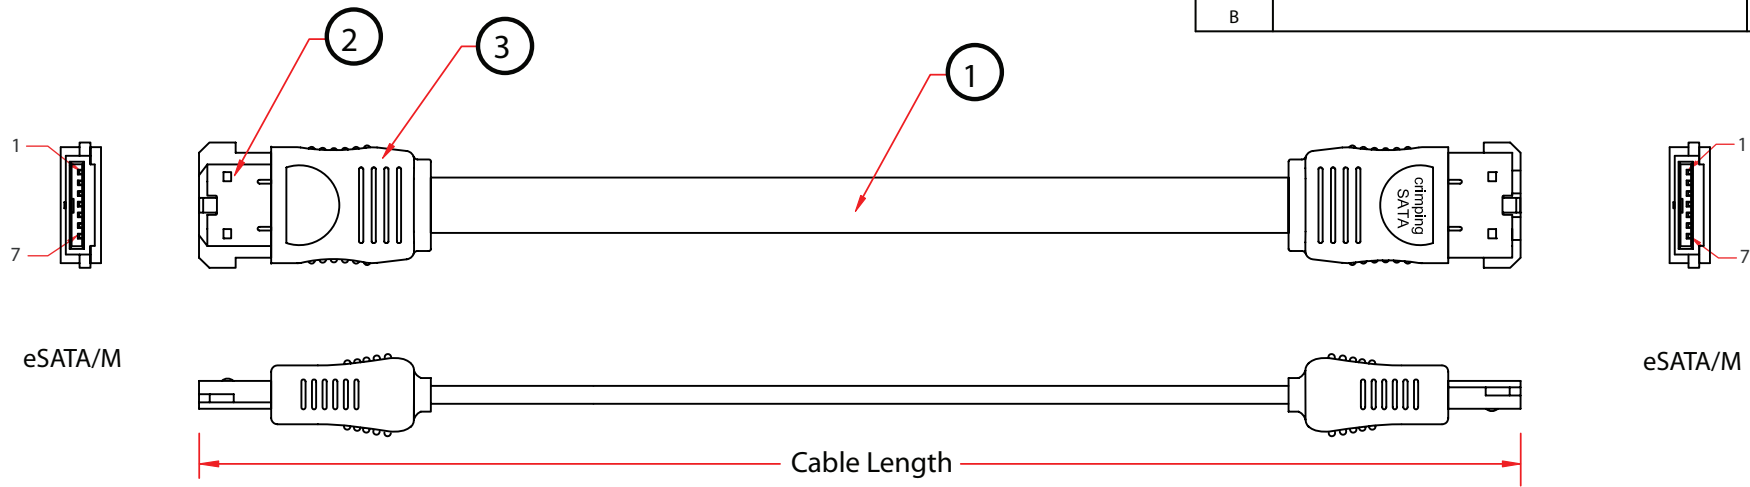

Electronical Property:
 Impedence: 100 ± 15 Ohms (Mated Connector)
 Rise Time: 85 ps Max

Pin Assignment	
eSATA Male	eSATA Male
1	1
2	2
3	3
4	4
5	5
6	6
7	7

RoHS

PART NO.	CABLE LENGTH
22SA-0005M	0.5M
21SA-001M	1M
21SA-0015M	1.5M

NO.	SPECIFICATIONS	ITEM NUMBER	22SA-0xxx	DRAWER	LIBRA
3	PVC molded, Color: Black	TITLE	External Serial ATA Cable, eSATA 300Mbps	CHECKED	
2	External Serial ATA Male Connector w/ Shell	MATERIAL	SCALE	APPROVED	
1	AWM 2725 (2Fx26AWG Solid Tinned Copper+ Drain 2Cx26AWG Solid Tinned Copper, w/AL-Foil)*2 + Braid 16/7/0.1mm Tinned Copper, OD: 4.0 x 9.0 mm, Black Outer PVC Jacket	REV.	A UNIT INCH		
	BOM LIST	DRAWING NO:		 888-212-8295.com	