



| REV. | DESCRIPTION | DATE    |
|------|-------------|---------|
| A    |             | 10-2012 |
|      |             |         |

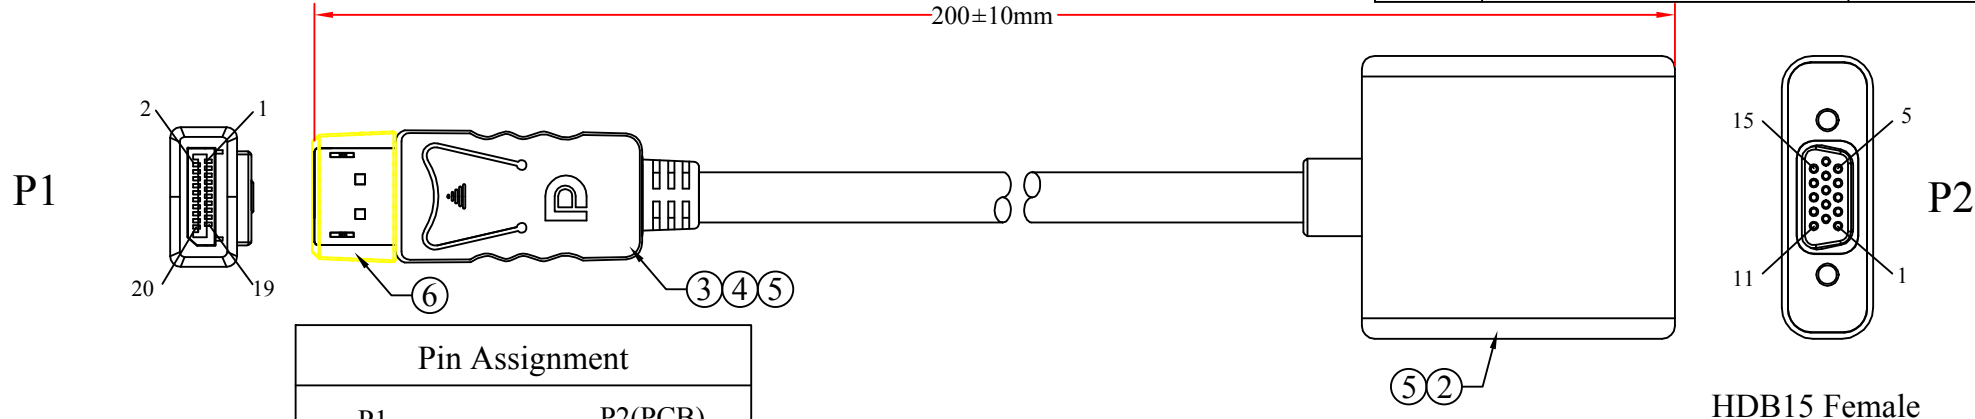

**Pin Assignment**

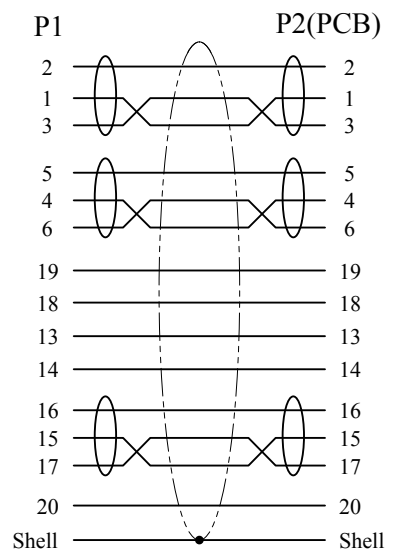

RoHS

**NOTES:**

- 1. Electrical Test:
  - <1>. 100% Open Short & Miss Wire Test.
  - <2>. Conductor Resistance: 2 ohm Max
  - <3>. Insulation Resistance: 10M ohm Min
  - <4>. Hi-Pot: 100V DC/10ms

|     |   |
|-----|---|
| 6   | Dust Cap  |
| 5   | Black Molded PVC  |
| 4   | Inside Molding: LDPE  |
| 3   | DisplayPort Male, With Latch, Insulation: Black, Pin Gold Plated, Shell Nickel Plated, Black ABS Plastic Hood |
| 2   | VGA HDB15 Female, PCB'A(An), Shell Nickel Plated, Black Metal Case  |
| 1   | UL20276(32AWG*1P+D+AL/MY)*5C+32AWG*5C+MY/AL+Braid, OD: 5.5±0.2mm, Black PVC Jacket                            |
| NO. | SPECIFICATIONS  |
|     | BOM LIST  |

|             |  |       |      |                      |    |
|-------------|--|-------|------|----------------------|----|
| ITEM NUMBER | 30H1-62100                                   |       |      | DRAWER               | JL |
| TITLE       | DisplayPort Male to VGA Female Adapter Cable |       |      | CHECKED              |    |
| MATERIAL    |  | SCALE |      | APPROVED             |    |
| REV.        | A  | UNIT  | INCH |                      |    |
| DRAWING NO: |  |       |      | <br>888-212-8295.com |    |
|             |  |       |      |                      |    |