


| | | |
|------|-------------|---------|
| Rev. | Description | Date |
| A | | 08-2021 |

RoHS

NOTES:


1.Electrical Test:

- (1). 100% Open Short & Miswire Test.
- (2). Withstand Voltage:300V DC Min.
- (3). Contact Impedance:5mΩ Max.
- (4). Insulation Resistance:10MΩ Min.

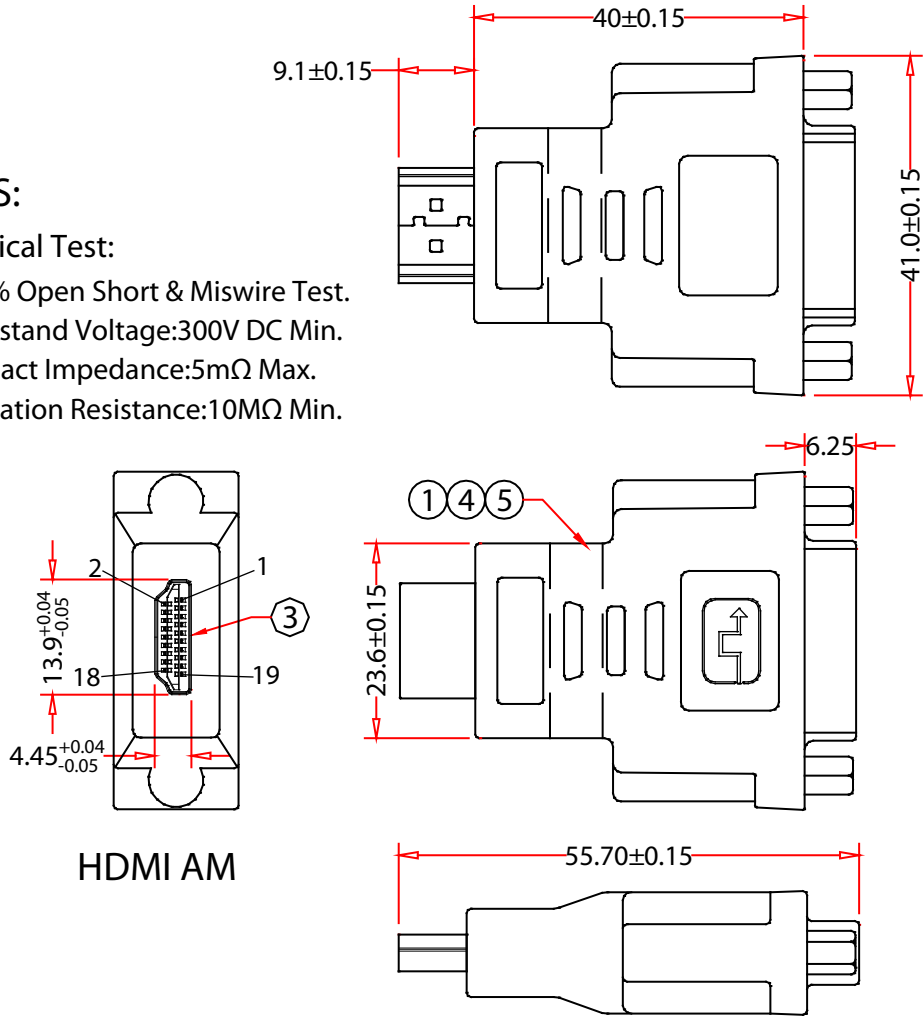

| Pin Assignment | | |
|----------------|-------------------|-------|
| HDMI AM | | DVI/F |
| 1 | _____ | 2 |
| 2 | _____ | 3 |
| 3 | _____ | 1 |
| 4 | _____ | 10 |
| 5 | _____ | 11 |
| 6 | _____ | 9 |
| 7 | _____ | 18 |
| 8 | _____ | 19 |
| 9 | _____ | 17 |
| 10 | _____ | 23 |
| 11 | _____ | 22 |
| 12 | _____ | 24 |
| 15 | _____ | 6 |
| 16 | _____ | 7 |
| 17 | _____ | 15 |
| 18 | _____ | 14 |
| 19 | _____ | 16 |
| Shell | _____ Drain _____ | Shell |

| | |
|-----|---|
| 5 | Outer Molding PVC Black |
| 4 | Inner Molding PE |
| 3 | HDMI 19Pin Male, Terminal: C5191, Semi Tin Gold / Nickel G/F Shell: C2680/SPCC, All Gold/ Nickel, Rubber Core: LCP |
| 2 | DVI (24+5)Pin Female, Terminal: C2680, Semi Tin Gold/ Nickel G/F Shell: C2680/SPCC, Semi Tin Gold / Nickel, Rubber Core: LCP |
| 1 | Wire 28AWG (7/0.12) L:26mm*17 PCS, Drain Wire 28AWG(7/0.12) L:28mm*1 PCS |
| No. | Specifications |

| | | |
|--------------|-----------------------------------|---|
| Item Number: | 30HD-00310 | |
| Title: | DVI Female to HDMI A Male Adaptor | |
| Drawn by: | JL |  |
| Approved by: | MAC | |
| ID: | 232 | |