

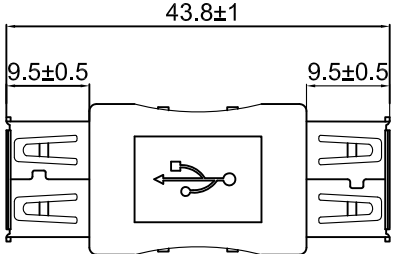


Rev.	Description	Date
A		08-2022

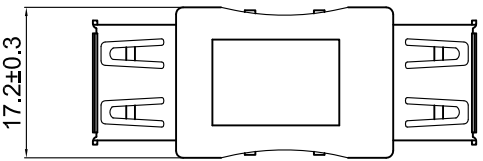

RoHS

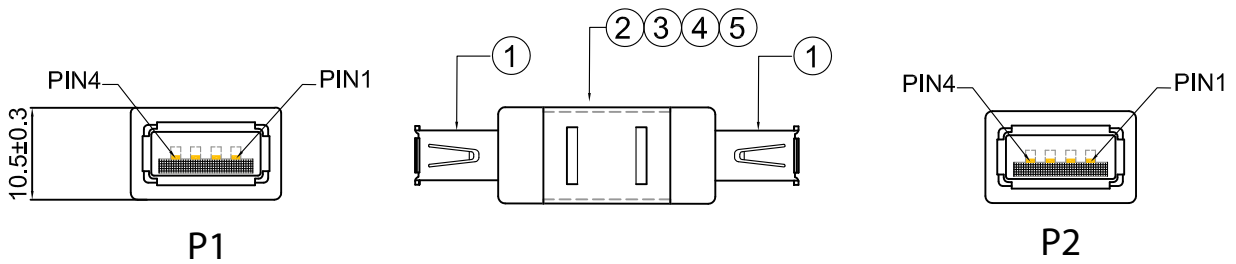

Pin Assignment	
P1	P2
1	1
2	2
3	3
4	4
Shell	Shell

**Test:**  
 (1) 100% Open Short and miswire test.  
 (2) Contact resistance 3Ω Max;  
 (3) Insulation resistance 5MΩ Min;  
 (4) High Voltage Test DC 300V/10mS.

5	Outer molded: PVC Black/45P	Item Number:	30U1-02400BK
4	Inner molded: PVC Black/45P	Title:	USB Coupler / Gender Changer, Type A Female to Type A Female
3	PCBA	Drawn by:	JL
2	Electronic wire	Approved by:	MAC
1	USB 2.0 A Female, Pin Gold flash, Nickel plated steel shell, Insulation: White	ID:	85
No.	Specifications	