


Rev.	Description	Date
A		09-2018

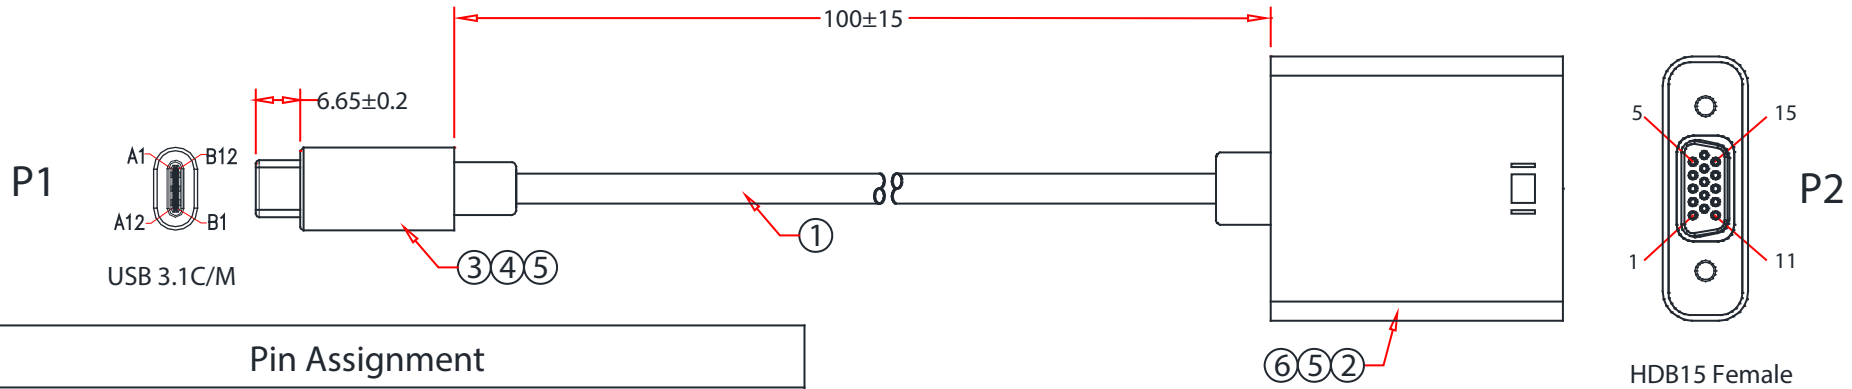

Pin Assignment			
P1	P2	P1	P2
A5	A5	A2	A2
A6	A6	A3	A3
A7	A7	A11	A11
A8	A8	A10	A10
B5	B5	B2	B2
B8	B8	B3	B3
		B11	B11
		B10	B10
		GND (A1,A12,B1,B12)	A1,A12,B1,B12
			Shell
		A4,A9,B4,B9	A4,A9,B4,B9

RoHS

NOTES:

- 1.Electrical Test:
 - <1>. 100% Open Shor & Miss Wire Test.
 - <2>. Conductor Resistance:2 ohm Max
 - <3>. Insulation Resistance:10M ohm Min
 - <4>.Hi-Pot:300V DC/10ms

6	Nut #4-40NUC, H4.75*8.6mm, Nickel Plated	Item Number:	30U2-35260
5	White Molded PVC	Title:	USB Type C Male to VGA Female Adapter
4	USB Type C On & Under the Tinplate Plating Nickel	Drawn by:	JL
3	USB3.1 Type C Male ,Shell Nickel Plated, Black Insulation, with PCBA, White ABS Cover 25*12.3*6.4mm	Approved by:	MAC
2	VGA Female, Shell Nickel Plated, With PCB, White ABS Cover	ID:	1
1	(1P*34#+EAM)*4C+1P*34#+2C*24#+4C*32#+AB, OD:3.9mm, White PVC Jacket		
No.	Specifications		

