

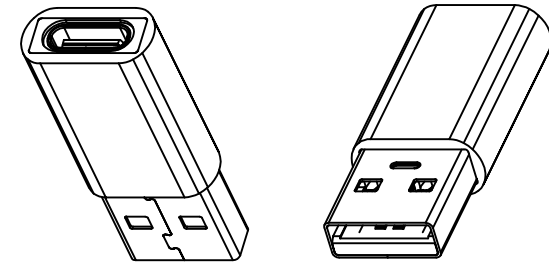


Rev.	Description	Date
A		10-2022




RoHS

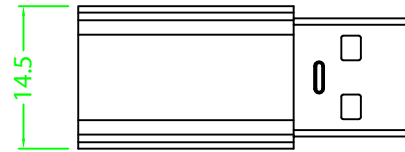


CN1



CN2

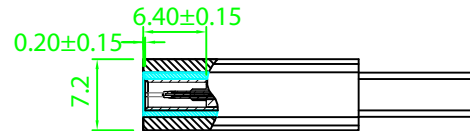

Pin Assignments

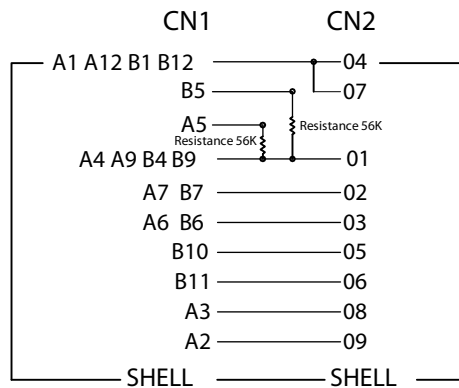

Notes:

- 100% short/open & wrong line test conditions.
- Conduction impedance $\leq 5\Omega$.
Voltage test :AC 300V/10mS. Leakage current 0.5mA.
Insulation impedance $\geq 10M\Omega$.
High voltage test :DC 300V/10mS.
- Mark "XX" as the key control size.
- Data transimmission: One side supports 5Gbps, another side supports 480Mbps

5	ALuminum Alloy Shell Black	Item Number:	30U3-33100
4	PVC Material 45P black	Title:	USB Type C Female to USB 3.0 Male Adapter
3	PCB T=1.00MM 2*Resistance 56K	Drawn by:	JL
2	USB TYPE C Female, Nickel Plated Shell, Pin Gold Plated G/F	Approved by:	MAC
1	USB 2.0 A Female, Pin Gold Flash, Nickel Plated Steel Shell, Insulation: White	ID:	108
No.	Specifications		