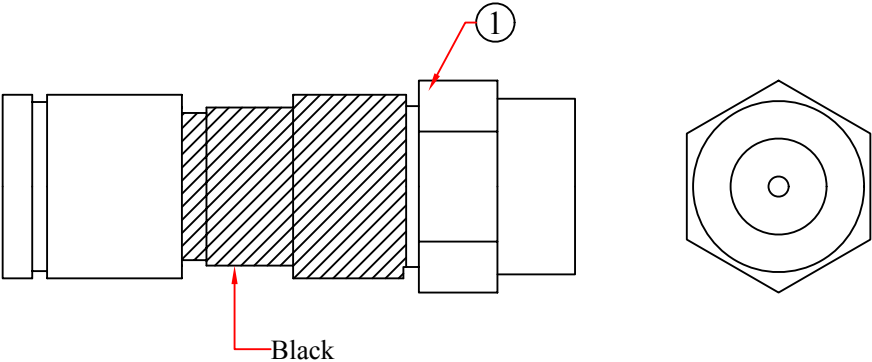


REV.	DESCRIPTION	DATE
A		02-2013

RoHS



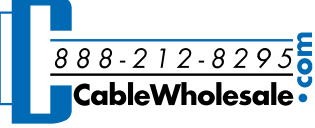


Product Specifications

Bandwidth: 0 MHz to 3 GHz
 Impedance: 75 Ohms
 Return Loss: Minimum -30 dB to 3 GHz
 Insertion Loss: Less than .10 dB to 3 GHz,
 Operating Temperature: -40°C to +140°C (-40°C to +60°C)
 Cable Retention: 45 lbs (20.41 kg) minimum Meets or exceeds all SCTE Specifications

Preparation and Installation Tools

universal drop cable preparation tool: LDT596-250,DDT59611
 7/16" snap torque wrench: TW207, TW307, TW307 AH

ITEM NUMBER	30X4-24000			DRAWER	JL
TITLE	RG6 F-pin Compression Connector, Quad and Dual Shield Compatible			CHECKED	
				APPROVED	
MATERIAL		SCALE		 	
REV.	A	UNIT	MM		
DRAWING NO:					

1	RG6 Universal compression connector, extended body, Nickel Plated
NO.	SPECIFICATIONS
BOM LIST	