
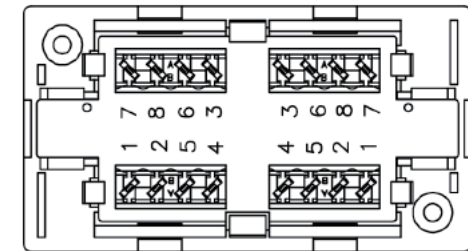
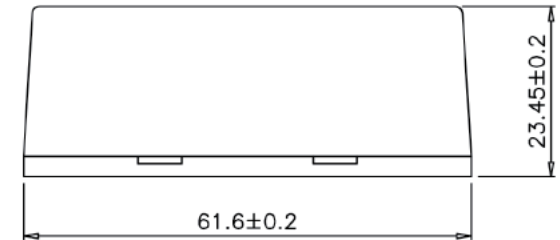

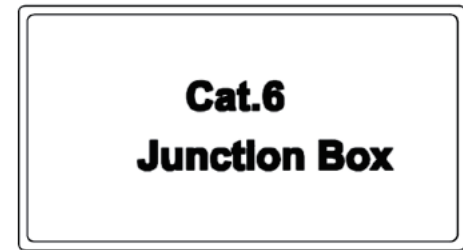


# RoHS

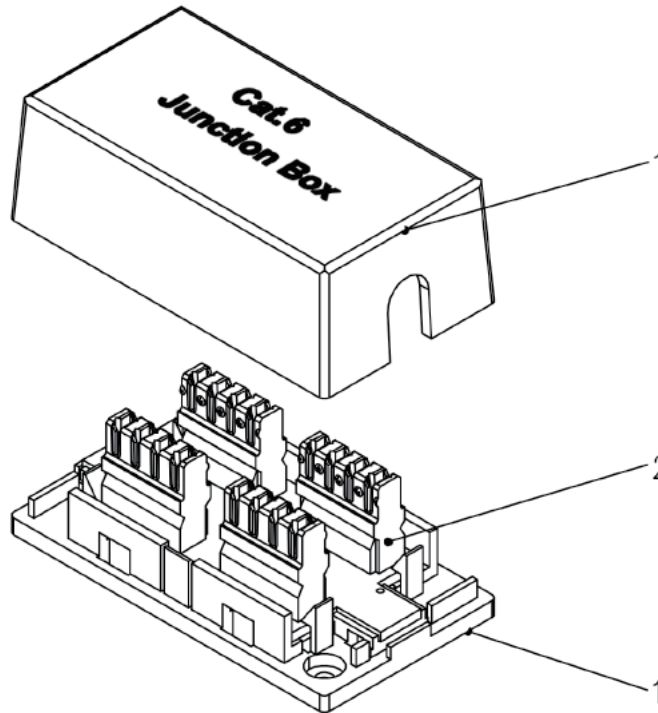

### Specification:


#### Material:

- 1.Box: ABS UL 94V-0,with white color.
- 2. IDC:
  - 2-1 Housing: PC+ Glass Fiber, UL 94V-2
  - 2-2 Terminal: Phosphor Bronze with Tin Plated.
- 3. PCB: FR4, UL 94V-0.

#### Performance:

- a. T568A&T568B wiring.
- b. Operating temperature:-10 °C to 60 °C (ISO/IEC 11801, ANSI/TIA/EIA 568 B.2)
- c. Durability: IDC: Suitable for 22-26 AWG stranded and solid wire, compatible with both 110&Krone punch down tools.
- d. The Cat.6 transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2-1 standard.

Rev.	Description	Date
A		07-2023

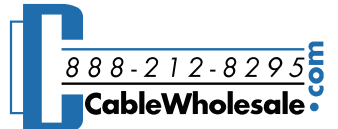Item Number:	30X8-11110	
Title:	Cat6 Inline Junction Box, 110 Punch Down Type	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	

No.	Specifications
-----	----------------