REV.	DESCRIPTION	DATE
A		01-2014



CN36 Male

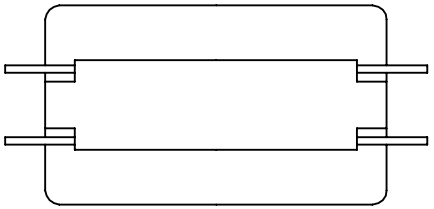



CN36 Male

Specification:

1. Voltage Rating: 300 VAC(rms).
2. Current Rating: 5 AMP Continuous.
3. Dielectric Strength: 1000 VAC.
4. Insulation Resistance: 5000 Mohm min.
5. Durability: 30 Cycles for Gold Flash,
   150 Cycles for 15u Gold Plated.
6. Corrosion Resistance: Meet MIL-STD-202F Method
   101 Condition B Salt Water, Spray for Gold Plated Over 15u.
7. Mating Force Insertion Force: 1 oz -6 oz
   Average 150 gram, Extraction Force: 1 KG min.

RoHS

ITEM NUMBER	31C1-10100			DRAWER	JL
TITLE	Mini Gender Changer Centronics 36 (CN36) Male to Male			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:					

888-212-8295 CableWholesale.com