




REV.	DESCRIPTION	DATE
A		01-2014



CN50 Female


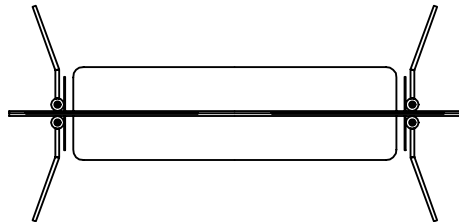


CN50 Female

Specification:

1. Voltage Rating: 300 VAC(rms).
2. Current Rating: 5 AMP Continuous.
3. Dielectric Strength: 1000 VAC.
4. Insulation Resistance: 5000 Mohm min.
5. Durability: 30 Cycles for Gold Flash, 150 Cycles for 15u Gold Plated.
6. Corrosion Resistance: Meet MIL-STD-202F Method 101 Condition B Salt Water, Spray for Gold Plated Over 15u.
7. Mating Force Insertion Force: 1 oz -6 oz
Average 150 gram, Extraction Force: 1 KG min.

RoHS

ITEM NUMBER	31C2-08400			DRAWER	JL
TITLE	Mini Gender Changer Centronics 50 (CN50) Female to Female			CHECKED	
				APPROVED	
MATERIAL		SCALE		 	
REV.	A	UNIT	MM		
DRAWING NO:				