

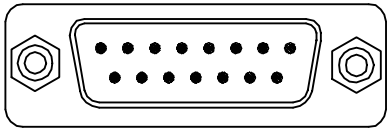


| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | 01-2014 |
| | | |

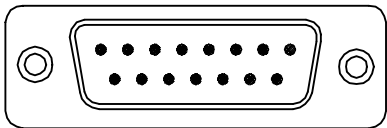

DB15 Female



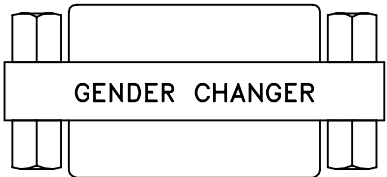


DB15 Female

RoHS

Specification:

1. Voltage Rating: 300 VAC(rms).
2. Current Rating: 5 AMP Continuous.
3. Dielectric Strength: 1000 VAC.
4. Insulation Resistance: 5000 Mohm min.
5. Durability: 30 Cycles for Gold Flash, 150 Cycles for 15u Gold Plated.
6. Corrosion Resistance: Meet MIL-STD-202F Method 101 Condition B Salt Water, Spray for Gold Plated Over 15u.
7. Mating Force Insertion Force: 1 oz -6 oz
Average 150 gram, Extraction Force: 1 KG min.

| | | | | | |
|-------------|-------------------------------------------------------------|-------|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| ITEM NUMBER | 31D2-02400 | | | DRAWER | JL |
| TITLE | Apple/Mac Mini Gender Changer DB15 Female to DB15 Female | | | CHECKED | |
| | | | | APPROVED | |
| MATERIAL | | SCALE | |   | |
| REV. | A | UNIT | MM | | |
| DRAWING NO: | | | |  | |
| | | | | | |