


Rev.	Description	Date
A		03-2019

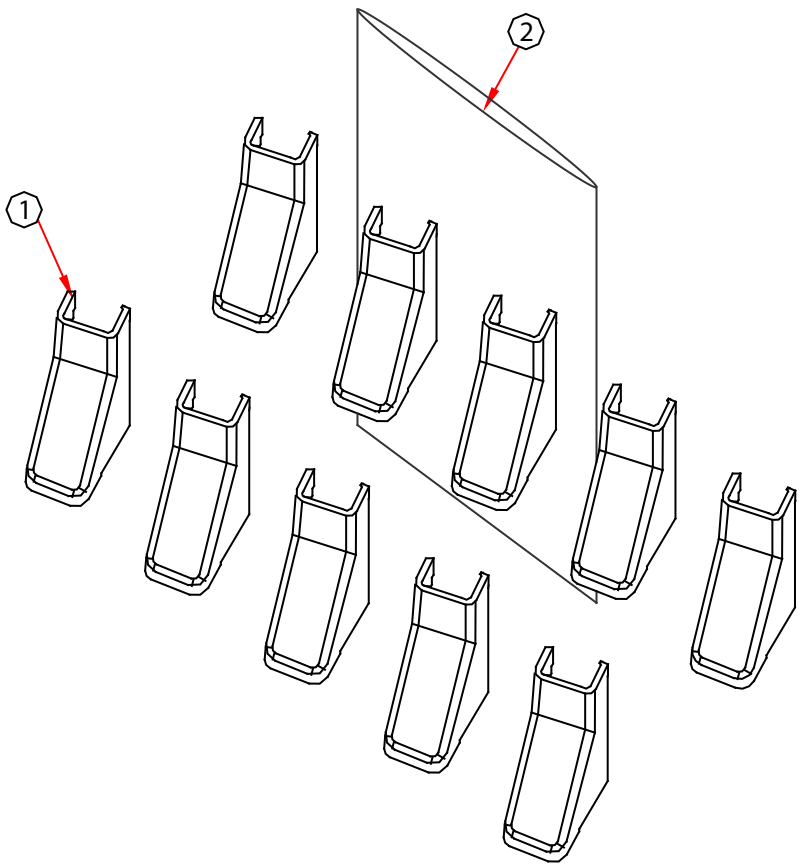

RoHS

General Specifications


1. UOM: 10 / Pack
2. Crush Resistance: 300 lbs. per GR3126 Requirement
3. Application: Indoor
4. Warranty: 1 Year Defects In Workmanship / 10 Year Environmental
5. Installation Temperature Range: -18°C ro 45°C
6. Chemical Resistance: Retains a minimum of 50% of tensile strength after 30 day exposure to 3% H2SO4, .2N NaOH, NH3, 90% Alcohol, Kerosene, 10% Igepal
7. Fungus Resistance: ASTM G21 Zero Rating Per GR 3126 Requirement

Environmental Specifications

Operating Temperature: -18°C to 58°C

PART NO.	SIZE	COLOR
31R1-004IV	3/4 inch	Ivory
31R1-004WH	3/4 inch	White

4	
3	
2	Polybag
1	Body Material: Rigid Flexible PVC
No.	Specifications

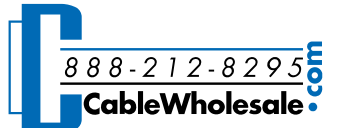Item Number:	31R1-004xx	
Title:	3/4 inch Surface Mount Cable Raceway, Ceiling Entry	
Drawn by:	JL	
Approved by:	MAC	
ID:	271	