
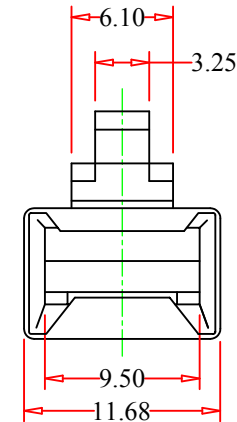
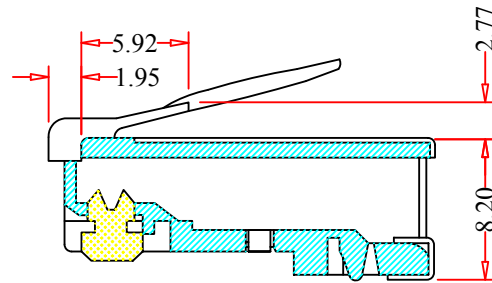
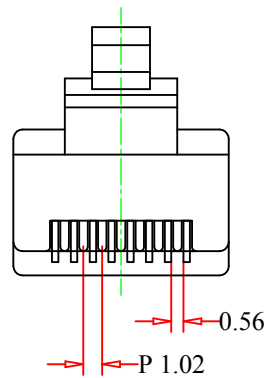
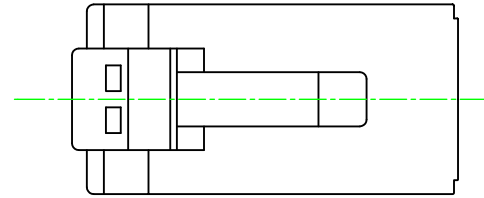


REV.	DESCRIPTION	DATE
A		08-2015

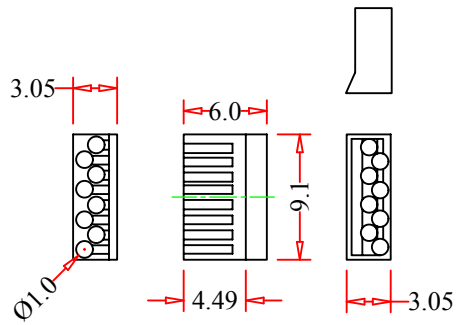

RoHS

**Notes:**

Operation Temperature: -40°C to 80°C  
 Cable to Tensile Strength: 7.7Kgs

4	
3	Shell: Brass, Nickel Plated
2	Contact, Gold Plated 15u"
1	RJ45(8P8C)Plug Body, Material: Polycarbonate, UL 94V-2, NO Poison, Color:Transparence
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	31X8-580HD			DRAWER	JL
TITLE	CAT6 Shielded Crimp Connector for Stranded Cable w/guides (100 Pcs Per Bag)			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:				 888-212-8295.com <b>CableWholesale.com</b>	
ID(NO.)	1				