
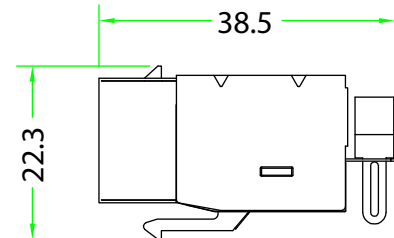




Rev.	Description	Date
A		10-2018

RoHS

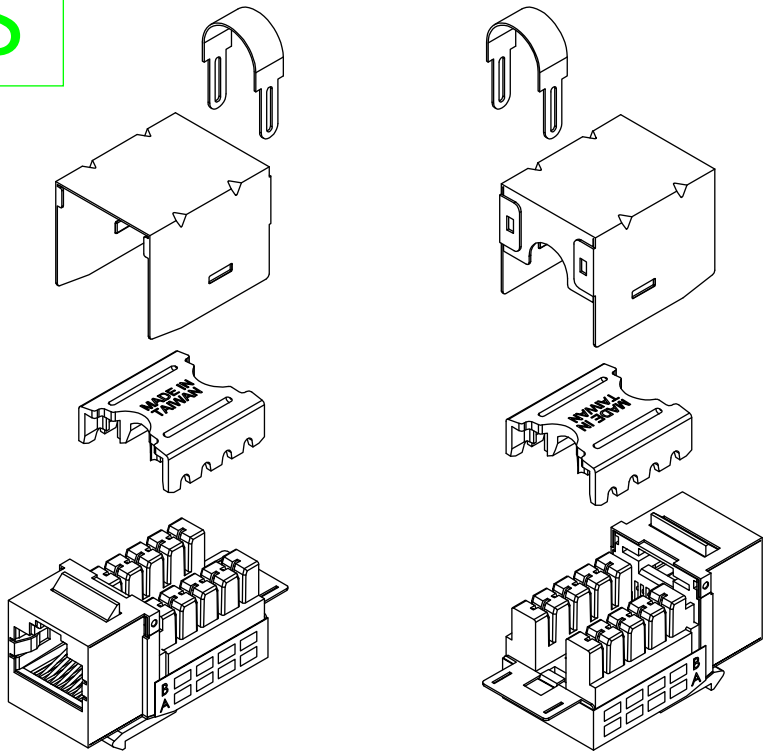


Performance:
Meets CAT6A EIA/TIA 568C Standard.

Materials :
 Boay: Fireproof ABS UL-94V0
 Metallic Case: Metal
 Jack: 8P8C 50 Micro Inches Gold Plated
 PCB: FR-4 / UL-94V0
 IDC Cap: Fireproof ABS UL-94V0
 IDC Body: Fireproof ABS UL-94V0
 IDC Pin: Bronze & Tinned
 IDC Description: For 22-26 AWG
 For 110 Punch-Down Tool

Electrical Specification:
 Insulation Resistance: 500M ohms(min.)
 Contact Resistance: 20M ohms(max.)
 Current Rating: 1.5Amps
 DC Resistance: 0.1 ohm(max.)
 Withstanding Voltage: 1000 VAC RMS@60Hz/1min.

Mechanical Specification:
 IDC Punch Down Cycle: Over 250 Cycles(min.)
 Jack Insertion Cycle: Over 2000 Cycles(min.)

Operation Temperature: -40°C ~ +70°C

Item Number:	33X6-520	
Title:	Shielded Cat6a Keystone, RJ45 Female to 110 Punch Down	
Drawn by:	JL	
Approved by:	MAC	
ID:	95	

No.	Specifications
-----	----------------