
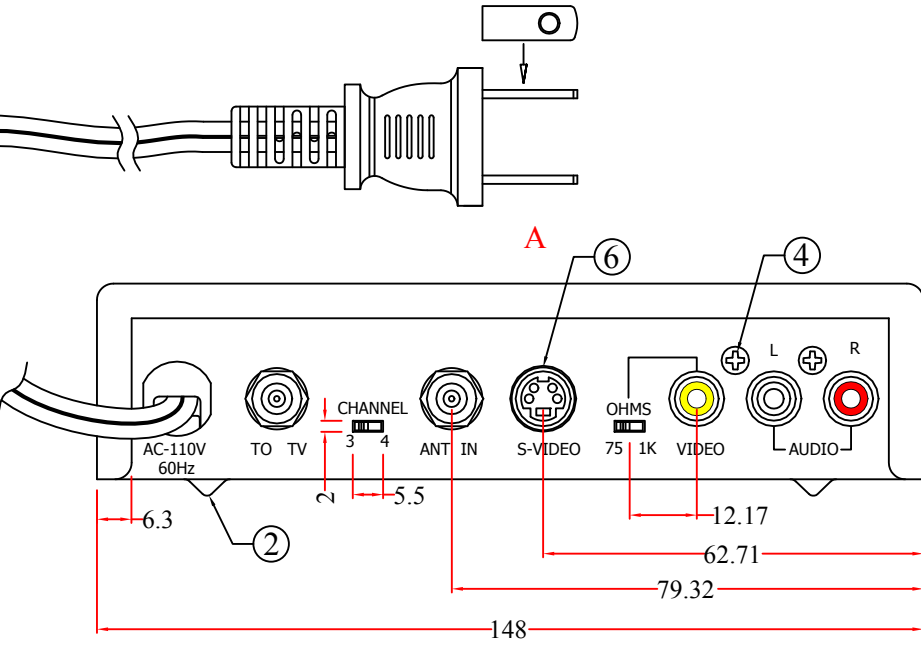


RoHS

REV.	DESCRIPTION	DATE
A		03-2012

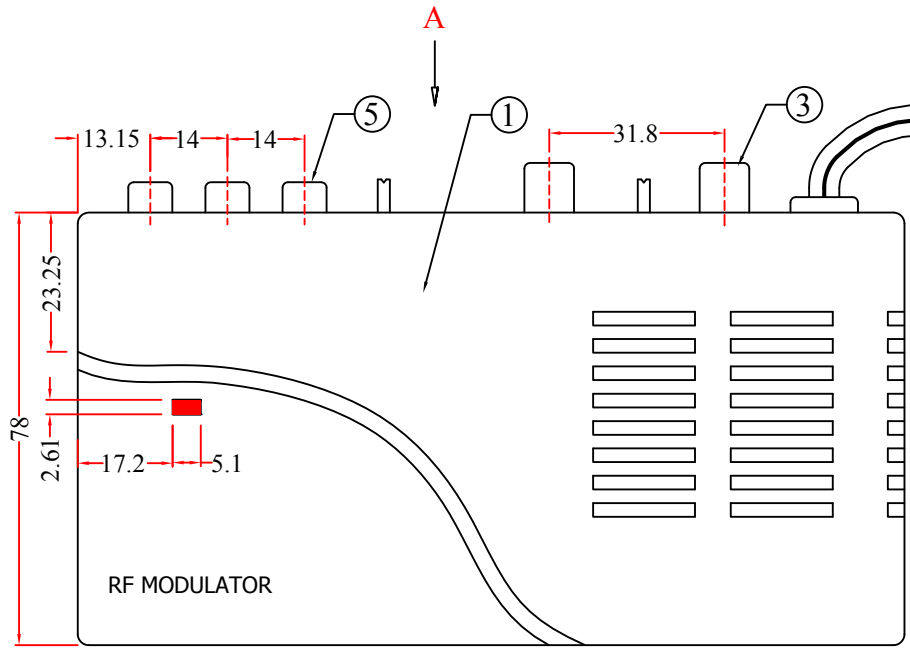

NOTE:

1. Power Requirements:120V AC,60Hz, 4.5W
2. RF Output Channels:3 or 4,Impedance:75Ohms
- 3.Video Input Impedance:75 or 1K Ohms
4. Audio Input Impedance:13 ±3K Ohms
5. TV to ANT Insertion Loss 50-806MHz:-2db
6. Video Carrier Output Level:69dBμV

Cover Dimensions:5- 13/16x3- 1/16x1- 7/16(148x78x37mm)
 Weight: **1 lb 2.5oz(0.524kg)**

NO.	SPECIFICATIONS	BOM LIST
6	S-Video 4P Female,Nickel Plated	
5	RCA Female,Nickel Plated	
4	Balck Lacquer Plated Screw	
3	F Port, Material:Zinc, Nickel Plated	
2	Balck Lacquer Plated Base	
1	Black ABS Cover	

ITEM NUMBER	40X3-30400			DRAWER	JL
TITLE	RF Modulator, Channel 3/4, with S-Video			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:					