


RoHS

Rev.	Description	Date
A		02-2019

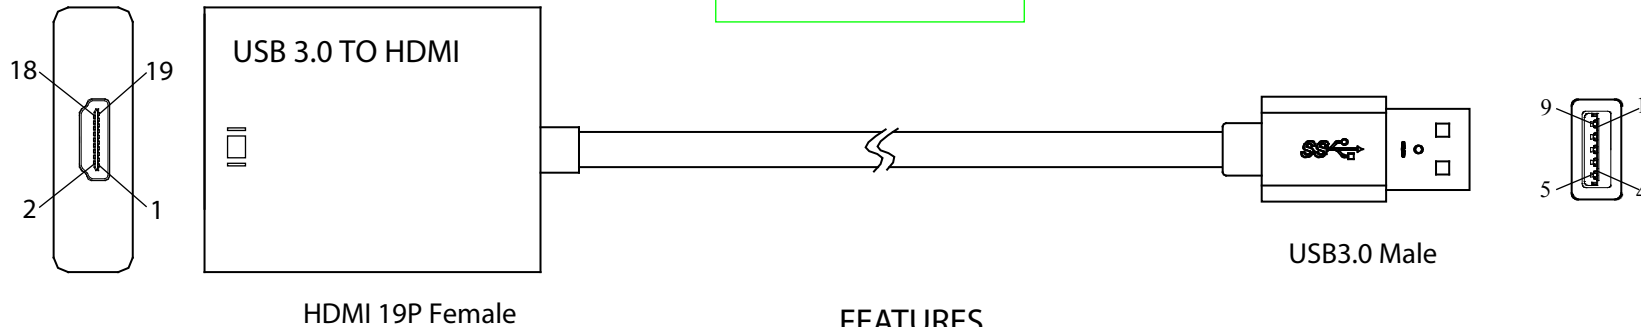


SPECIFICATIONS

Signal Inputs/Output	
Input port	USB 3.0 A Male x1
Output port	HDMI Female x1
Operating Frequency	
Video Amplifier Bandwidth	Max to 1.65Gbps/165MHz
Warranty	
Limited Warranty	1 Year Parts and Labor
Environmental	
Operating Temperature	0°C to +70°C
Operating Humidity	10% to 85 % RH (no condensation)
Storage Temperature	-10°C to +80°C
Storage Humidity	5% to 90 % RH (no condensation)
Power Requirement	
External Power Supply	NO
Power consumption (Max)	1.27W
Accessories Adapter	
Weight	0.04Kg
Remote control	NO
User Manual	English Version

FEATURES

1. Compliant with USB 3.0 specification.
2. Compliant with HDMI specification v1.3.
3. USB 3.0 5GMbps bandwidth for connecting to computers
4. Support USB 3.0 input and HDMI output.
5. Backward compatible with USB 2.0 specification.
6. Supports for External Display Interface IC's via
7. Supports display cloning and extending.
8. USB video supports Primary, Extended, Mirror, Rotate
9. Reduced power operating mode ,supports bus-powered and self-powered operation
10. Supports Operating system for computers:
Windows: Windows 7, Windows 8, Windows Vista, Windows XP, Mac OS X v10.7, Mac OS X v10.8.

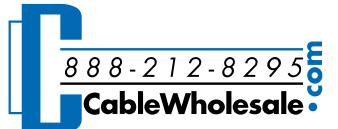Item Number:	41V3-30110	
Title:	USB 2.0/3.0 to HDMI Adapter with Audio, Add Extra Monitor to Computer/Laptop, Hassle Free	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	

No.	Specifications
-----	----------------