
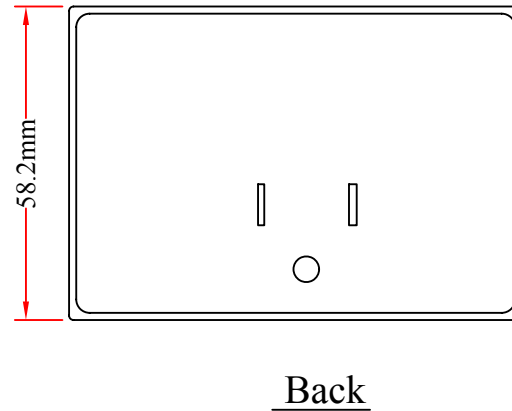


RoHS

| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | 06-2013 |
| | | |

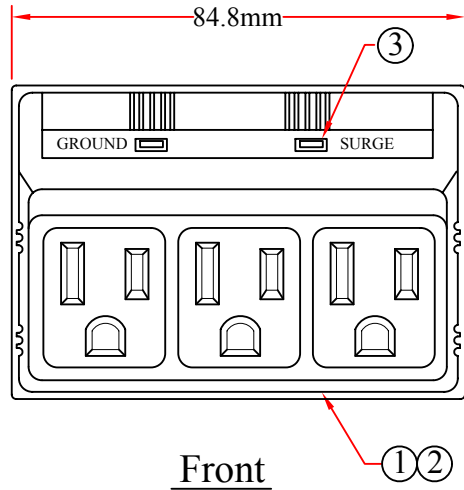

| Parameter Specifications | | |
|--------------------------|------------------------|----------------|
| Clamping Voltage | 500V | |
| Electrical Rating | 125V/15A/1875W | |
| Frequency Range | 50/60HZ | |
| Protection Mode | (L-W) (L-G) (N-G) | |
| Max. Transient Energy | 750 Joules | |
| Max. Transient Current | 13500A | |
| Max. Spilke Voltage | 6000V | |
| Responde Time | Less Than 1 Nanosecond | |
| EMI/RFI | Frequency | 150KHz - 30MHz |
| Noise Filter | Attenuation | Up To 20 dB |

| | | | | | | |
|----------|-----------------------------|-------------|--|------|----------|----|
| | | ITEM NUMBER | 50W1-905304 | | DRAWER | JL |
| | | TITLE | Surge Protector, 3 Outlet, LED Power Indicator | | CHECKED | |
| | | MATERIAL | SCALE | | APPROVED | |
| 3 | LED Indicator, Red & Green | REV. | A | UNIT | INCH | |
| 2 | A/C Power ,NEMA 5-15P,Brass | DRAWING NO: | | | | |
| 1 | Cover ,Gray | | | | | |
| NO. | SPECIFICATIONS | | | | | |
| BOM LIST | | | | | | |