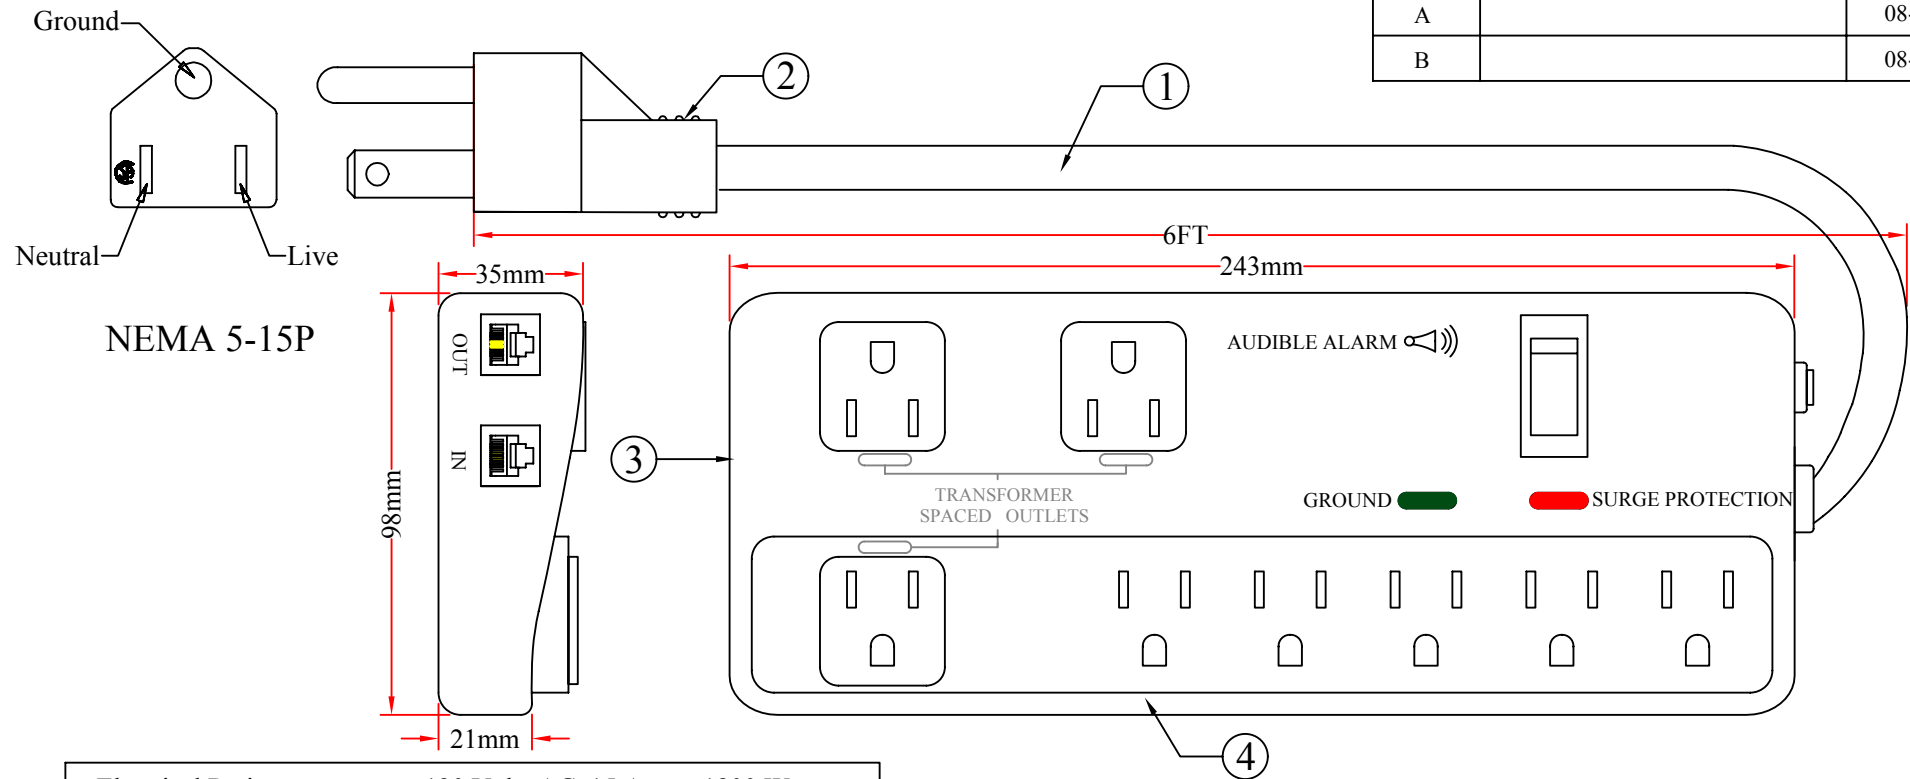


REV.	DESCRIPTION	DATE
A		08-2012
B		08-2013





Electrical Rating -----120 Volts AC. 15 Amps. 1800 Watts
 Max. Spike Voltage ----- 6KV
 Maximum Surge Dissipation ----- 2160 joules
 Max. Spike Current ----- 144000 Amps[3- Line Total]
 UL Clamping Voltage -----L-N 330V,L-G /N-G 400 Volts
 Clamping Response Time ----- Less than 1 nanoseconds
 EMI/RFI Noise Filter : Frequency ----- 150KHz~100MH
 Attenuation ----- Up to 58dB

TEL/FAX/Modem Protection:
 Outlets ----- 2 x RJ11 Jacks
 Energy ----- 160J

RoHS

NO.	SPECIFICATIONS
4	8 Outlet Strip, Color: White
3	RJ11 Jack
2	UL/CSA Approved NEMA 5-15P, Color: White
1	UL/CSA Approved SJT 14AWG X 3C, 105°C, Lead-Free, Color: White
BOM LIST	

ITEM NUMBER	51W1-10013M			DRAWER	JL
TITLE	8 Outlet Surge Protector (Professional) with Fax Modem, Max 2160 Joules 6 ft cable			CHECKED	
				APPROVED	
MATERIAL		SCALE		 	
REV.	A	UNIT	INCH		
DRAWING NO:				