
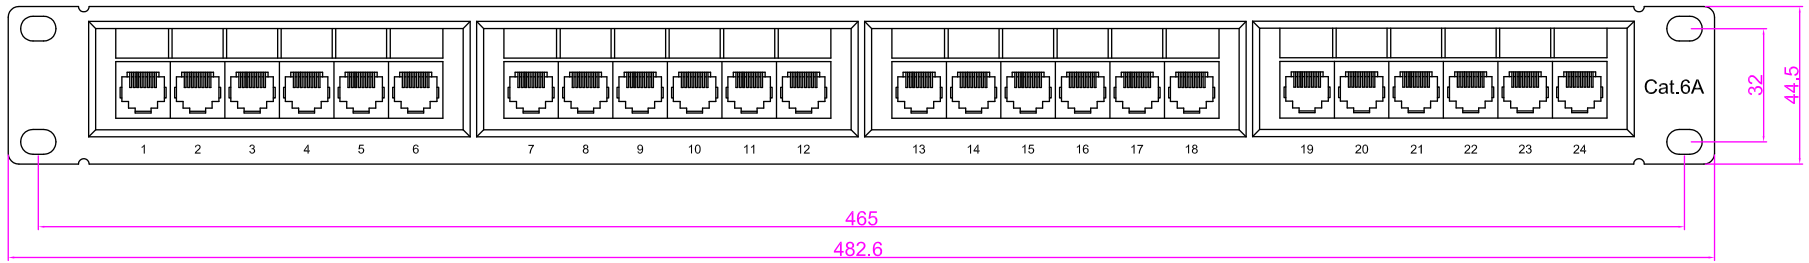
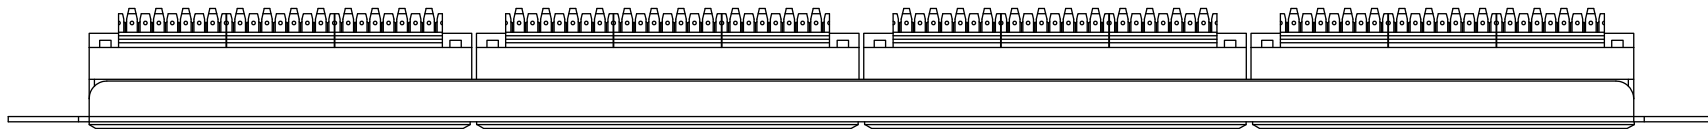


Rev.	Description	Date
A		12-2018

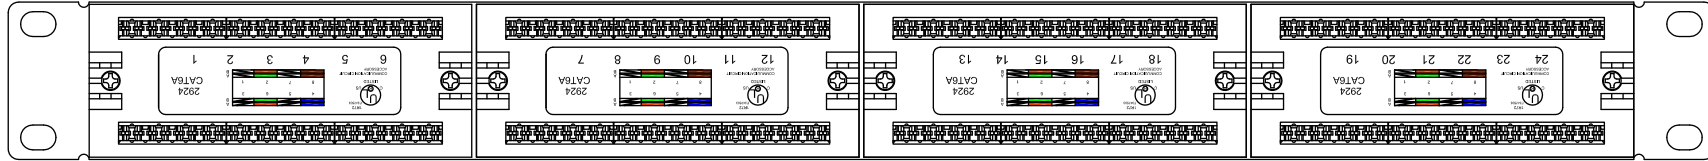

Electrical:

1. Current Rating: 1.5AMP
2. Contact Resistance: 100 Milliohms Max.
3. Insulation Resistance: 1000 Megohms Min. @ 500V DC
4. Dielectric Strength: 750V AC RMS 60Hz, 1Min


Environmental:

1. Storage: -40 °C to +70 °C
 2. Operation: 0 °C to +60 °C
- Conform to TIA/EIA 865B Category 3 .

Mechanical:

1. Housing Material: PBT+15% Glass
2. Panel Frame Material: SPCC, Black or Industrial Gray Electrostatic Powder Coating
3. RJ45 Jack Life: 750 Times Min.
4. IDC LiFE: 200 Times Min.
5. Contact Material: Phosphor Bronze Stamp Pin T=0.30mm
6. IDC Contact Material: Phosphor Bronze T=0.05mm(50µm) Nickel Plating
7. Wire: AWG22-26

Color coding information			
T568A		T568B	
1	White/Green	1	White/Orange
2	Green	2	Orange
3	White/Orange	3	White/Green
4	Blue	4	Blue
5	White/Blue	5	White/Blue
6	Orange	6	Green
7	White/Brown	7	White/Brown
8	Brown	8	Brown

Item Number:	69BK-16024	
Title:	19" UTP Cat.6A Patch Panel, 24 Ports, 110 IDC	
Drawn by:	JL	
Approved by:	MAC	
ID:	280	

No.	Specifications
-----	----------------