

REV.	DESCRIPTION	DATE
A		01-2014


Product Specifications

Construction & Material :

Item		Specifications
Product		UL PVC Telephone Cable
Conductor	Construction	Stranded 26AWG(7/0.16mm)
	Material	Bare Copper
Insulation	Material	PP
	Avg.thickness	0.23mm
	Diameter	0.95 ± 0.05 mm
	Color	Blue, Yellow, Green, Red, Black , White
Jacket	Material	PVC
	Avg.thickness	0.65 mm
	Diameter	(2.50±0.15)*(7.00± 0.20) mm
	Color	Silver Gray
Marking	Exxxxxx UL AWM 20251 26AWG 60□ 150V VW-1 CSA LLxxxxxx I/II A 60□ 150V FT1	

RoHS

Cross Section

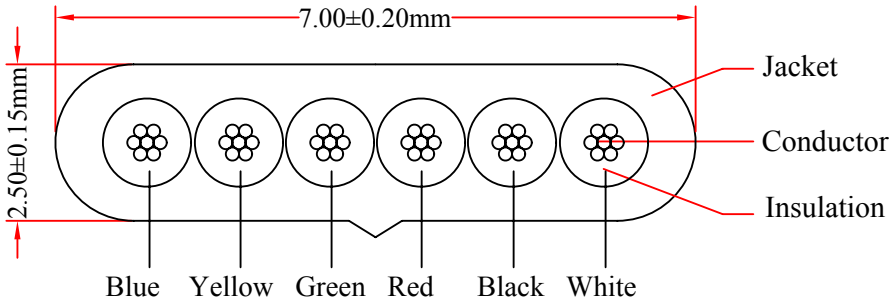

DRAWER	JL
CHECKED	
APPROVED	
⊕	⏏

CONDUCTOR RESISTANCE	PART NUMBER	TITLE
AT 20°C, 139.76Ω/Km Max	8606-4500S	Bulk Telephone Cable, Silver Satin, 26/6 (26 AWG 6 Conductor) Spool, 1000 foot

