


ITEM NUMBER	91W1-20400 (XP400)	91W1-20600 (XP600)
Power rating	400VA/210W	600VA/330W
Input		
Voltage	120VAC	
Voltage Range	96-138VAC	
Frequency Range	50Hz/ 60Hz (A uto Sensing)	
Input type	Input NEMA 5-15 plug	
Output		
Output voltage	120VAC	
Frequency Range(batt.mode)	50Hz(60Hz)+/- 1%	
Transfer time	4ms typical	
waveform (batt.mode)	Simulated Sine-wave	
Outlet Type	NEMA 5-15R(4) back up+NEMA 5-15R(4) surge protection	
Protection	Overload, short circuit, over discharger and over charger	
Line mode overload	>110% + 10% Alarm and turn off output after 1min. and then continue to alarms, >200% + 10% fault immediately	
Battery mode overload	>110% + 10% fault after 1min, >120% + 10% fault immediately	
Battery		
Battery voltage	12Vdc	
Battery type&number(Leoch)	12V4.5AH	12V6AH
Typical Recharge Time	8hours typical to 90%	
Typical Backup time	1min @ full R Load	
Indicators		
Display	12Vdc	
Alarm	Battery mode: Sounding every 30 seconds Low battery: Sounding every 0.5 seconds Over load: Continuous sounding Fault: Continuous sounding	
Physical		
Dimension(W * H * D)(mm)	125*84*305	
Net Weight (kgs)	2.7	3.2

Rev.	Description	Date
A		10-2018

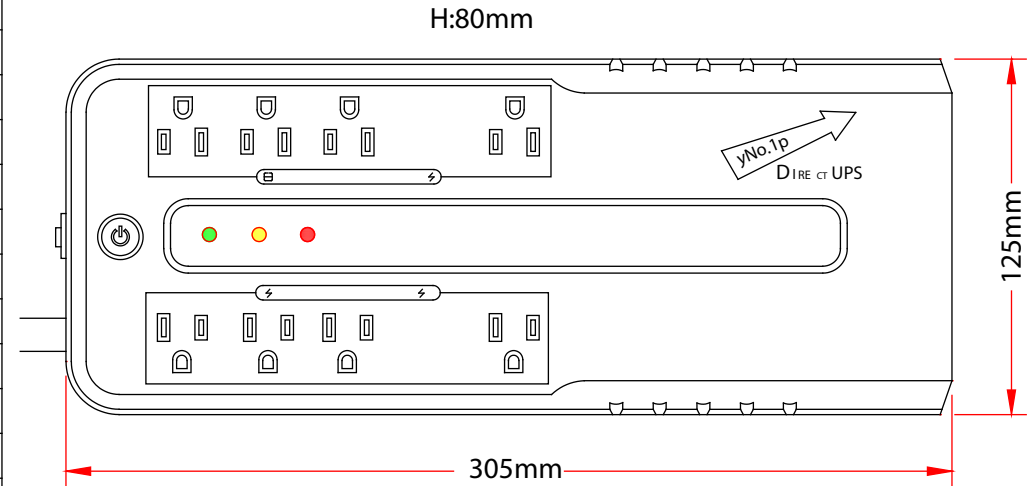

Interface
HID USB : Yes
TVSS: Yes

Environment
Operation Humidity:10-90%
Operation Temperature:0-40C

Safety : cTUV-us
Conduction:Fcc Part-15 ClassB
Radiation:Fcc Part-15 Class B



PART NO.	POWER RATING
91W1-20400	400VA/210W
91W1-20600	600VA/330W

Item Number:	91W1-20400&20600	
Title:	Surge Strip UPS, Black, Uninterrupted Power Supply	
Drawn by:	JL	
Approved by:	MAC	
ID:	73	