


Rev.	Description	Date
A		10-2018

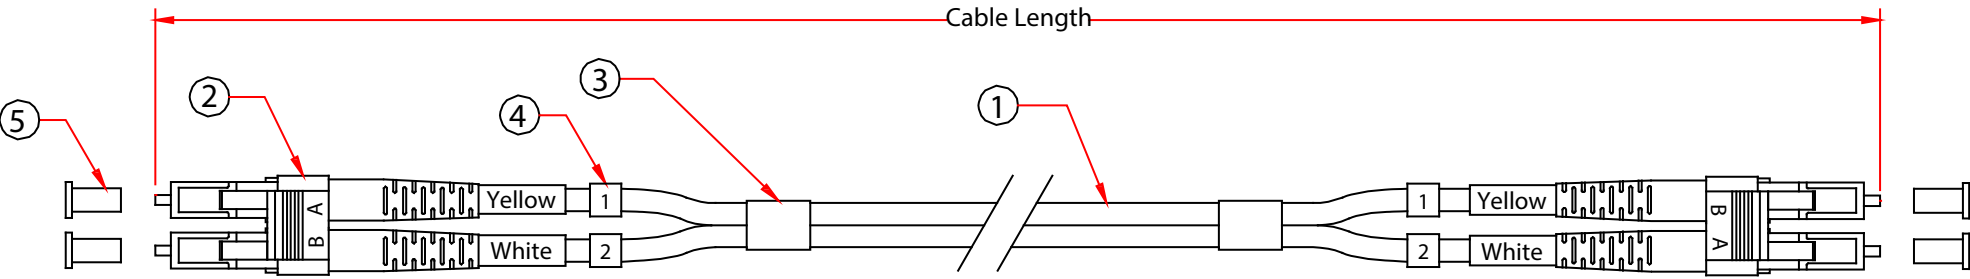


NOTES:

1. Insertion loss < 0.3 dB
2. Return loss > 55 dB
3. Fiber Extention: $-0.05 \mu\text{m} < H < +0.05 \mu\text{m}$
4. ? 1.25um Ferrule End-face Radius: $7 < R < 25\text{mm}$
5. Apex Offset: < 50 μm
6. Increase in Insertion Loss after 500 mating: 0.2 dB Max.
7. Operatlon Temperature: -20° to $+70^\circ$.
8. Storage Temperature: -20° to $+70^\circ$.

RoHS

PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH
LCLC-01201-PL	1 Meter	LCLC-01208-PL	8 Meter
LCLC-01202-PL	2 Meter	LCLC-01209-PL	9 Meter
LCLC-01203-PL	3 Meter	LCLC-01210-PL	10 Meter
LCLC-01204-PL	4 Meter	LCLC-01215-PL	15 Meter
LCLC-01205-PL	5 Meter	LCLC-01220-PL	20 Meter
LCLC-01206-PL	6 Meter	LCLC-01225-PL	25 Meter
LCLC-01207-PL	7 Meter	LCLC-01230-PL	30 Meter

6	
5	Cap
4	Channel Marker
3	Shrinkage Tube
2	LC/UPC SM Duplex Connector Ferrule is Ceramic Material (Blue Housing White Short Boot)
1	OD:2.0mm, Singlemode, Duplex, 9/125 Fiber Optic Cable, OFNP Riser Rated, Color:Yellow
No.	Specifications

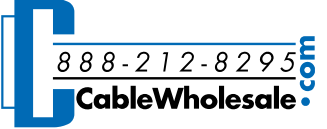Item Number:	LCLC-012xx-PL	
Title:	Plenum Fiber Optic Cable, LC / LC, Singlemode, Duplex, 9/125	
Drawn by:	JL	
Approved by:	MAC	
ID:	280	