


REV.	DESCRIPTION	DATE
A		03-2014

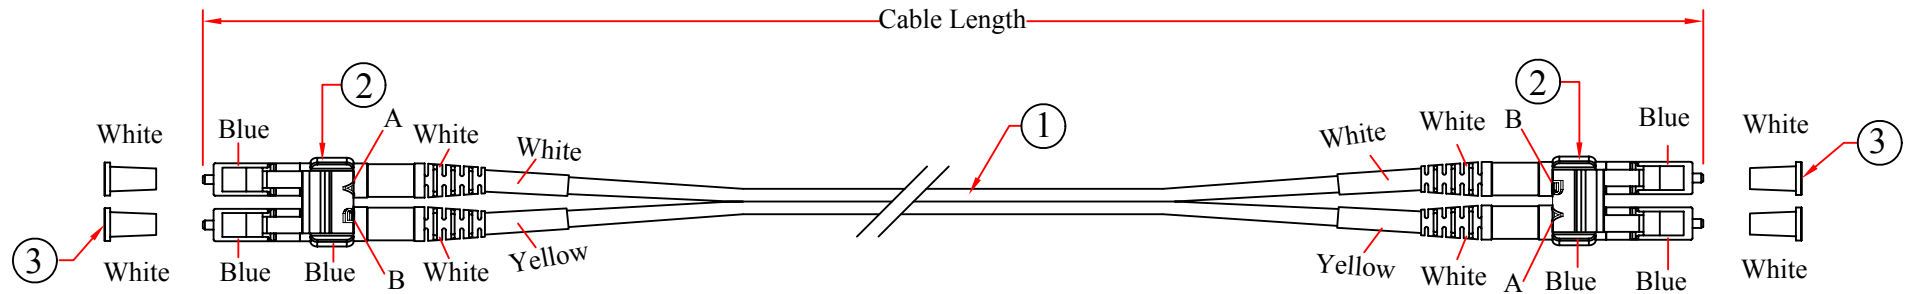

RoHS

PART NO.	CABLE LENGTH	PART NO.	CABLE LENGTH
LCLC-01201	1 Meter	LCLC-01208	8 Meter
LCLC-01202	2 Meter	LCLC-01209	9 Meter
LCLC-01203	3 Meter	LCLC-01210	10 Meter
LCLC-01204	4 Meter	LCLC-01215	15 Meter
LCLC-01205	5 Meter	LCLC-01220	20 Meter
LCLC-01206	6 Meter	LCLC-01225	25 Meter
LCLC-01207	7 Meter	LCLC-01230	30 Meter

NOTES:

1. Insertion loss < 0.3 dB
2. Return loss > 50 dB
3. Fiber Extention: -0.05 um < H < +0.05um
4. Ø1.25um Ferrule End-face Radius: 7< R < 25mm
5. Apex Offset: < 50um
6. Increase in Insertion Loss after 500 mating: 0.2 dB Max
7. Operating Temperature: -20 °C to +70 °C
8. Storage Temperature: -40 °C to +80 °C

NO.	SPECIFICATIONS	ITEM NUMBER	LCLC-012xx		DRAWER	JL
4		TITLE	Fiber Optic Cable, LC / LC, Singlemode, Duplex, 9/125		CHECKED	
3	Cap	MATERIAL	SCALE		APPROVED	
2	LC Singlemode (Easy Removable Clip and Short Boot)	REV.	A	UNIT	INCH	
1	OD:2.0mm, Singlemode, G652D 9/125um Optical Fiber Cable, Yellow Outer PVC Jacket	DRAWING NO:			 888-212-8295.com	
	BOM LIST	ID(NO.)	182			